




VGHM
PX9035-01G GLIDER RECLINER

SKU:11790361/11790373

Manufactured for Rooms To Go


Version:001
2025/6/12

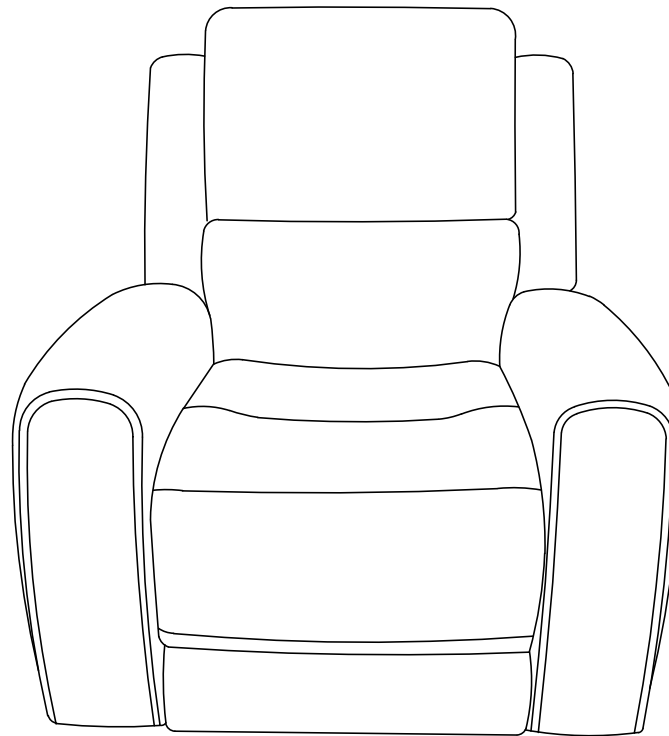


LIST OF PARTS


TOOLS REQUIRED:NO TOOLS REQUIRED

PART LIST

NO	DESCRIPTION	ITEM	QUANTITY
A	Seat		1
B	Backrest		1
C	LAF Back Wing		1
D	RAF Back Wing		1

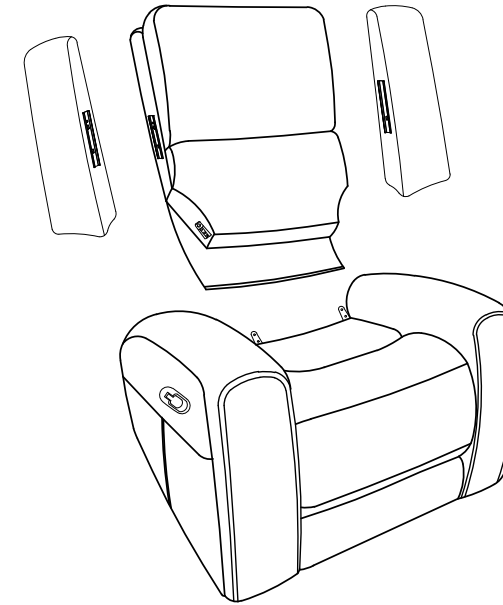

Take out the KD(C&D)wings underneath the Laf and Raf arms which fixed by the ropes,then you can remove the ropes away.

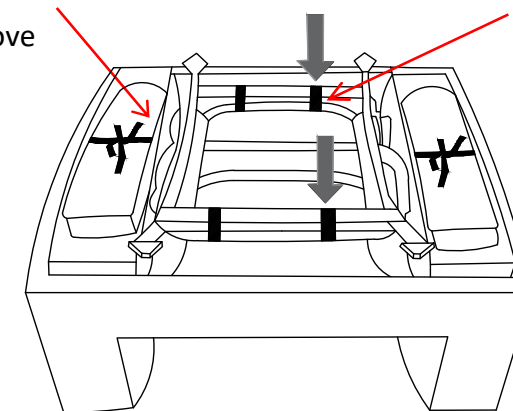


Check the bottom of the Seat (A) to cut and remove any fastener that is holding the mechanism in place during transportation

ASSEMBLY INSTRUCTIONS


STEP 1: Attaching the KD Backs (B)

Install the Backrest (B) into the Seat (A) by positioning the female metal receiver brackets over the male metal posts. Ensure that female metal receiver brackets on each side of the backrest are positioned over the seat metal posts, push down the female brackets over the male posts simultaneously until each side is locked into place with an audible "click" is heard. Install all backrests of sectional pieces in the same way described above.

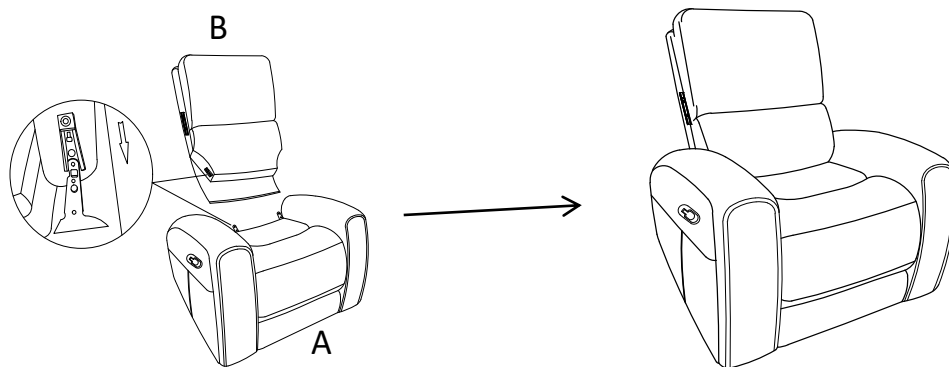

STEP 2: Attaching the KD Back Wings (C & D).


* Align the hardware on the LAF Back Wing (C) into the hardware on the side of the Backrest (B), pushing in a downward motion from the top of the back wing until it's firmly fixed. Repeat the same step to attach the RAF Back Wing (D) to the Backrest (B).

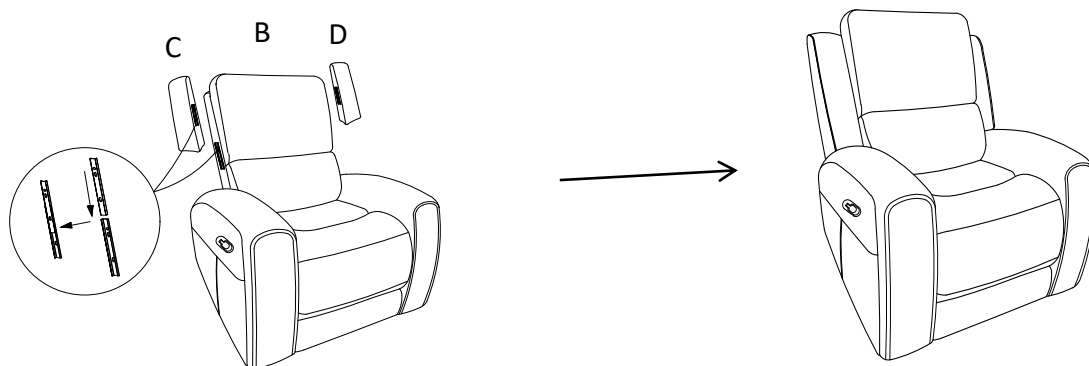

OPERATION

STEP 3:


Open the footrest by pulling the handle.

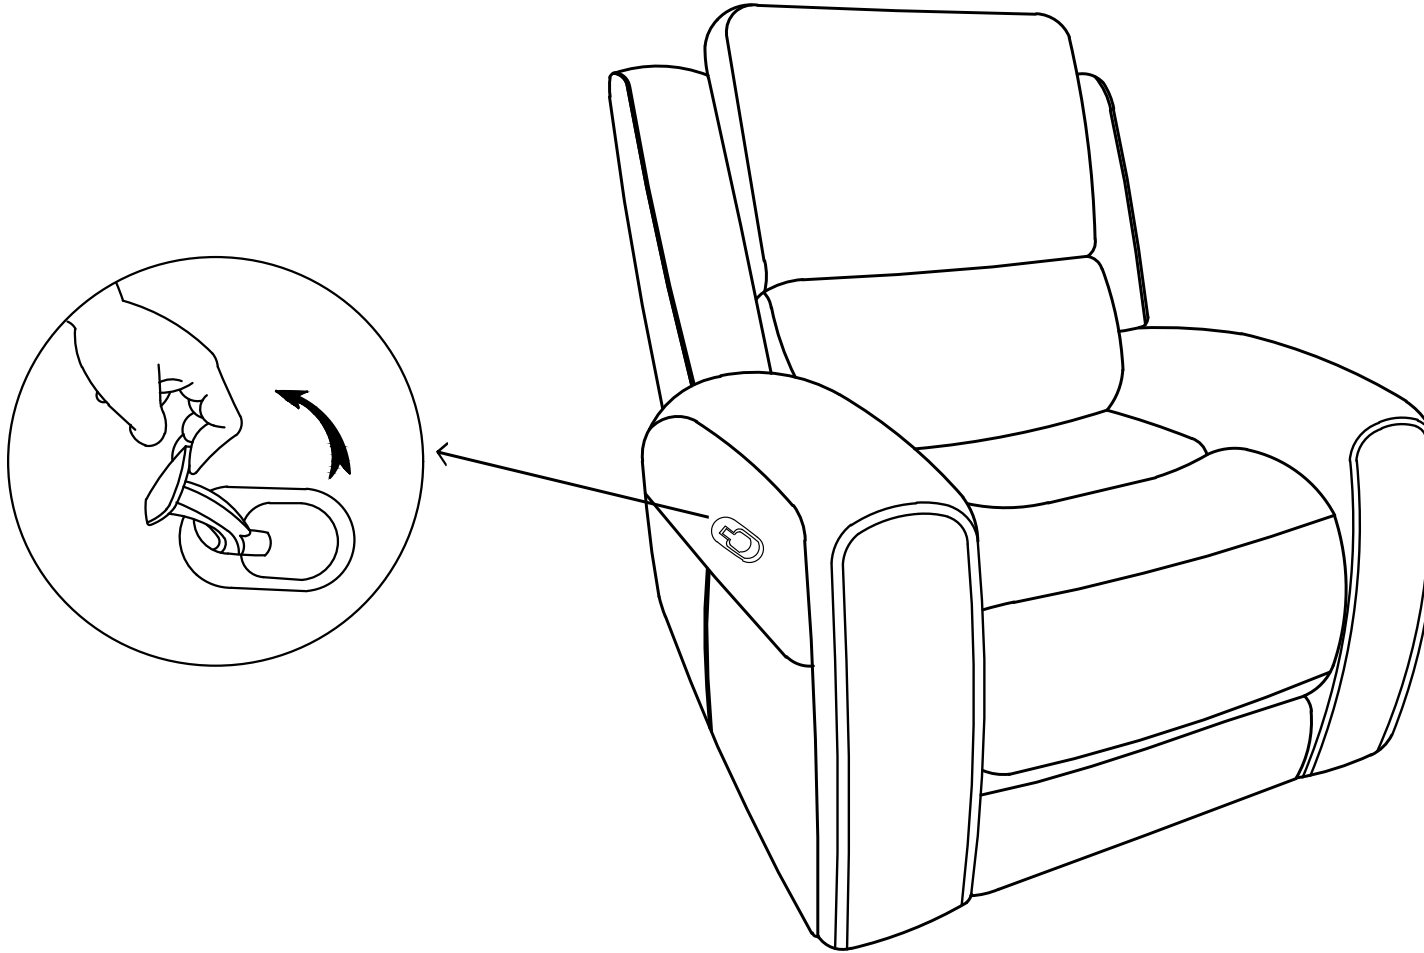

WARNINGS


*Keep unit at least 24" from all heat sources.

*Avoid placing unit in areas where unit can be exposed to direct sunlight other powerful light sources, as fading or discoloration may occur.




*Do not reach under seat when mechanism is operating or serious injury may occur.

*Reclining mechanism should only be operated while seated properly.



*Do not sit on arms or backrest.


*Do not jump or roughhouse on furniture



Maintain minimum of 6" space between the furniture backs and wall.




*If unit must be moved, do not drag. Unit must be lifted in order to be moved.



*Do not continuously operate mechanism for more than one minute or unit may go into protection mode by shutting down to prevent overheating.


*Unplug unit from power source prior to cleaning mechanism.

*Do not allow electrical components to come into contact with any liquids.



CARE AND CLEANING

*Upholstered furniture is packaged tightly to protect it during transit. This packaging can sometimes cause creases or misshaped cushions when the furniture comes out of the packaging. These issues will correct themselves over time as the fibers of the cushions are exposed to air. However, shaping the cushions with your hands can alleviate the creases and compressed fibers more quickly.



*Dust often and use a vacuum cleaner to remove debris from seams and crevasses.

*Use a soft damp cloth to gently clean soiled areas and wipe clean. Do not rub.

*Do not use household cleaners or solvents. Such cleaners may cause damage and/or discoloration.

*Do regularly use dedicated leather care product onto the leather furniture to prevent built up of body oils.

TROUBLESHOOTING

PROBLEM	SOLUTION
Backrests gaps	Ensure the backrests are properly clipped into the male posts located on seat mechanism(Step 1). Check that brackets are not loose, positioned improperly or bent.