



1 Attach the runners I to pieces 2, 3 and 6 as shown. Use screws (D).

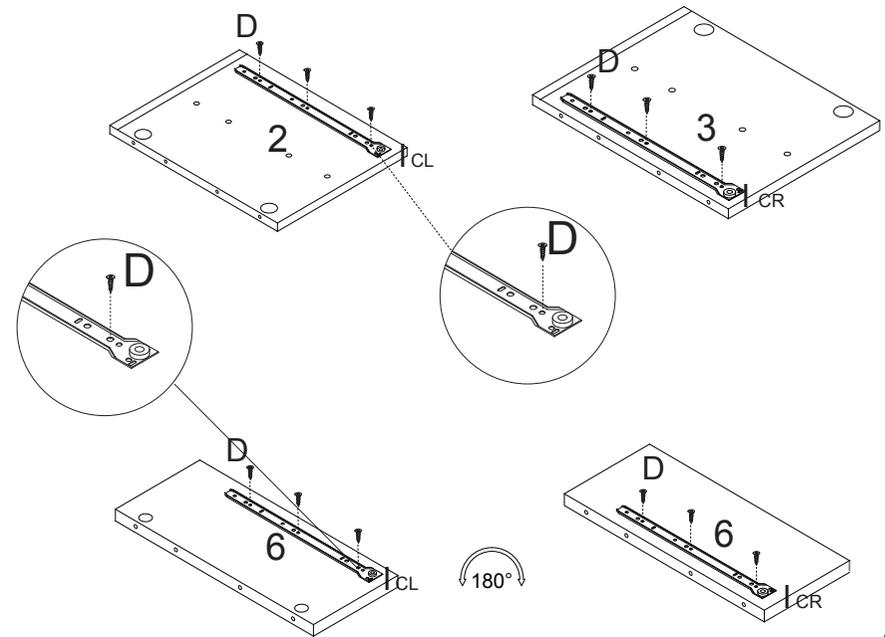


6 x2

A		28 PCS
B		28 PCS
C		24 PCS
D		36 PCS
E		20 PCS
F		9 PCS
G		20 PCS
H		4 PCS
I		3 PCS

2 Fix the piece 17 to piece 14, piece 18 to piece 15, piece 19 to piece 16 separately using screw (F).

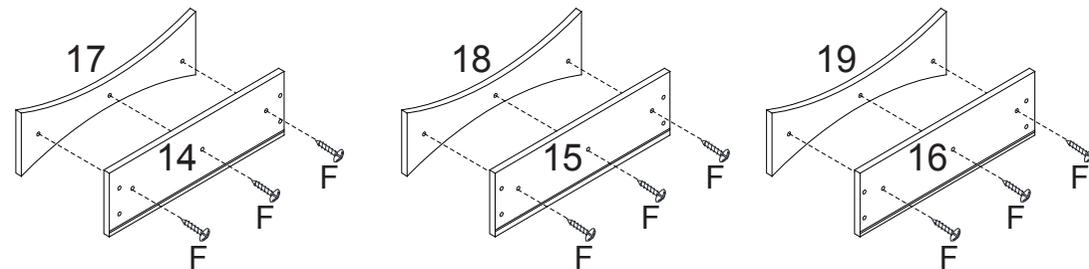


3 Attach pieces 10, 11 & 12 using screws (C). Make sure that the built-in ridge is facing inwards and at the bottom.

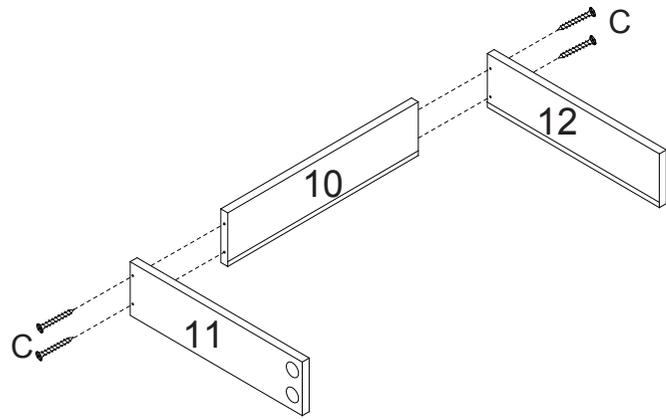


x3

4 Slot piece 13 into the ridges. First insert the cam locks (B) into the pre-drilled holes on parts 11 & 12. Then insert cam dowels (A) into each side, you then need to line up these screws with the pre-drilled holes on the front piece (17 18 19). Once attached, tighten the cam locks (B) using a cross-head screwdriver and ensure the piece is secure.

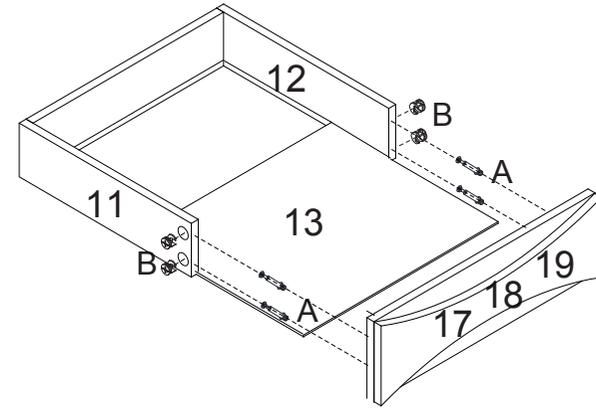


x3

5 Turn the drawer upside down. Line up the holes on the outside pieces with the holes on the runners (IDR & IDL), secure to the drawer using screws (D).

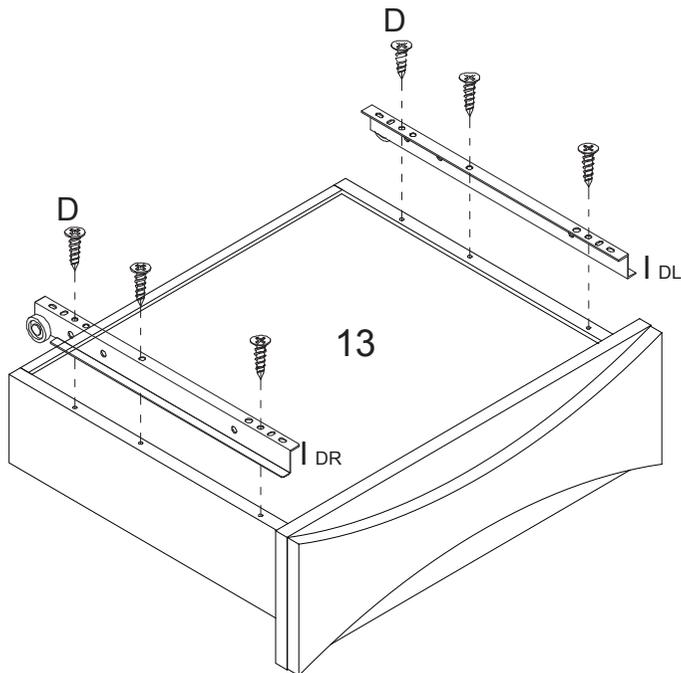


x3


6 Attach piece 4 to piece 5 using wooden dowels (H), screws (C).

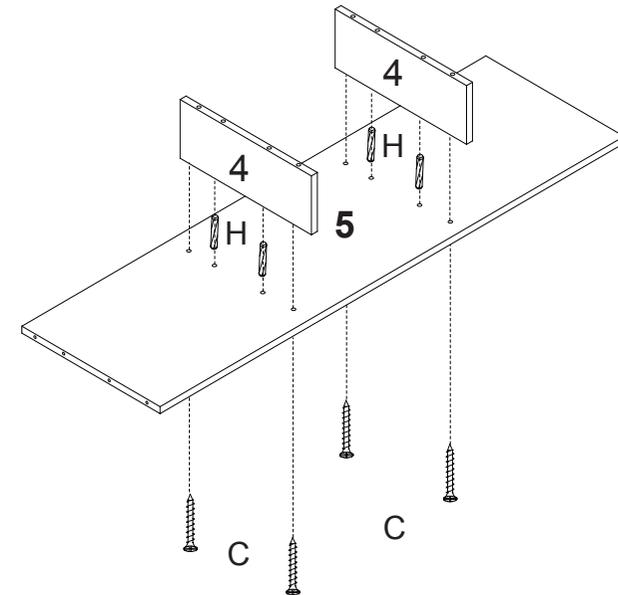


7 Then attach the section (4 & 5) to piece 6 using cam dowels (A) and cam locks (B). Then tighten the cross dowels.

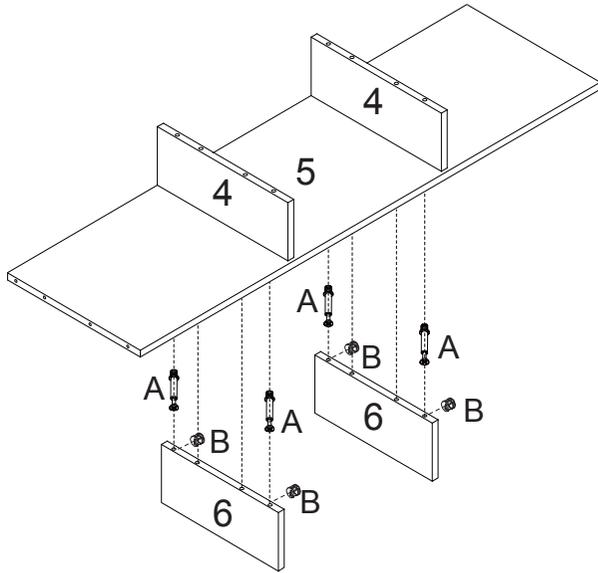


8 Attach the section (4, 5 & 6) to piece 2 & 3 using wooden dowels (G), cam dowels (A) and cam locks (B). Then tighten the cross dowels.

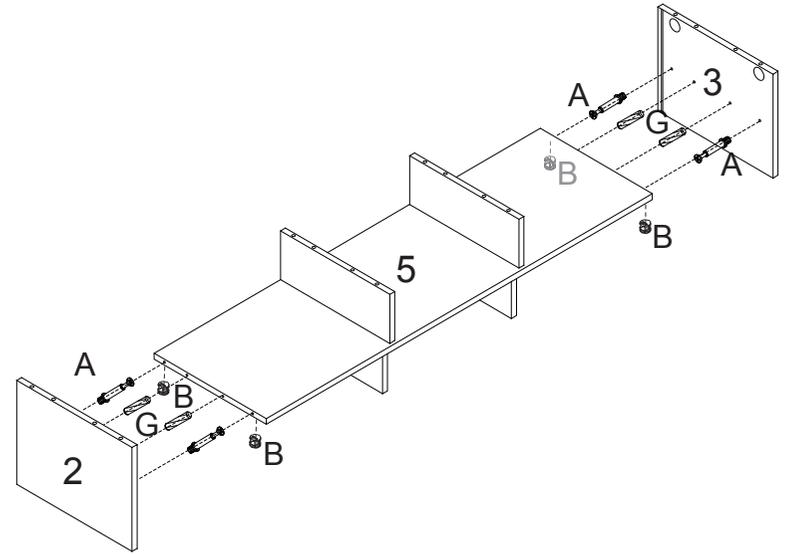

9 Attach piece 7 using the dowels (G) as a guideline, then secure with screws (C).

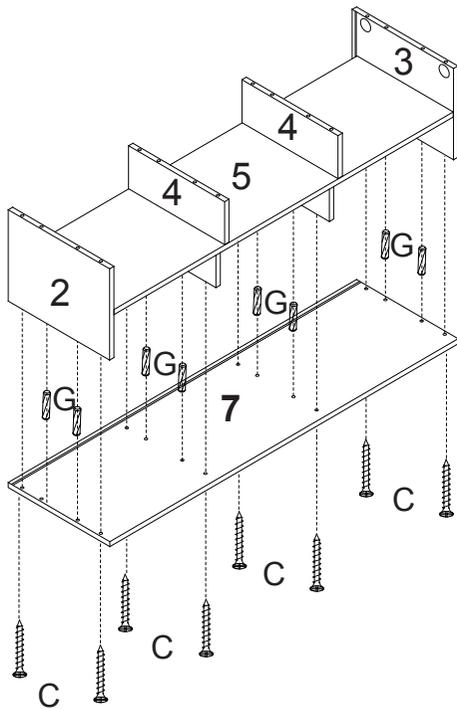


10 Slot in piece 8 to the built-in ridges. Then add piece 1 to the unit using wooden dowels (S), cam dowels (A) and cam locks (B).

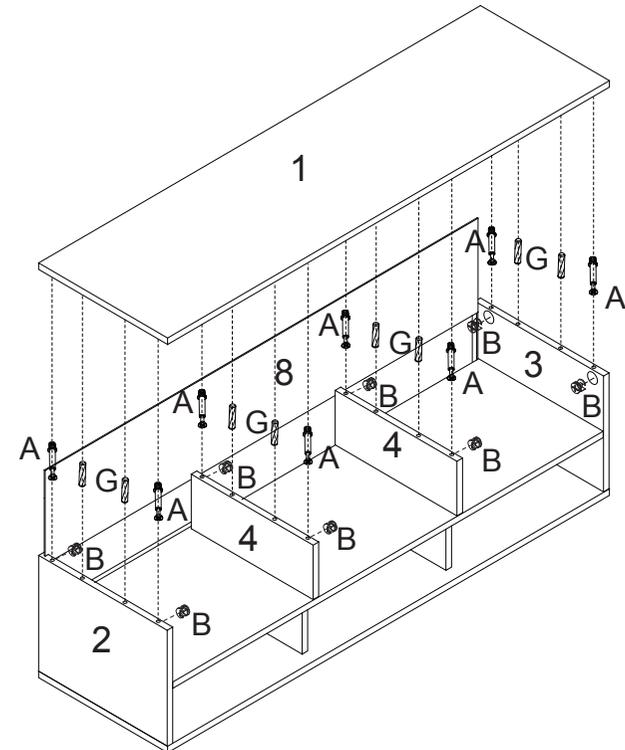


11

Turn the unit upside down, fix the piece 9 to piece 7 using screw (E).

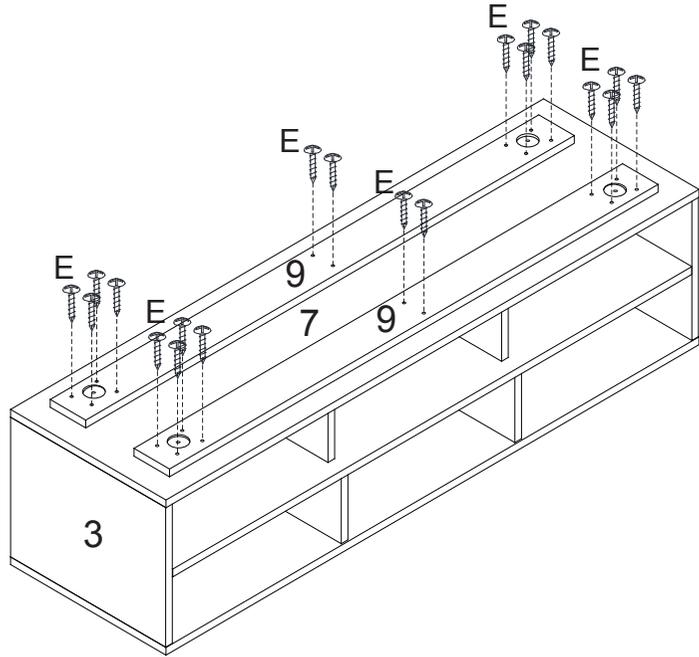


12

Tighten the leg (20) clockwise direction.

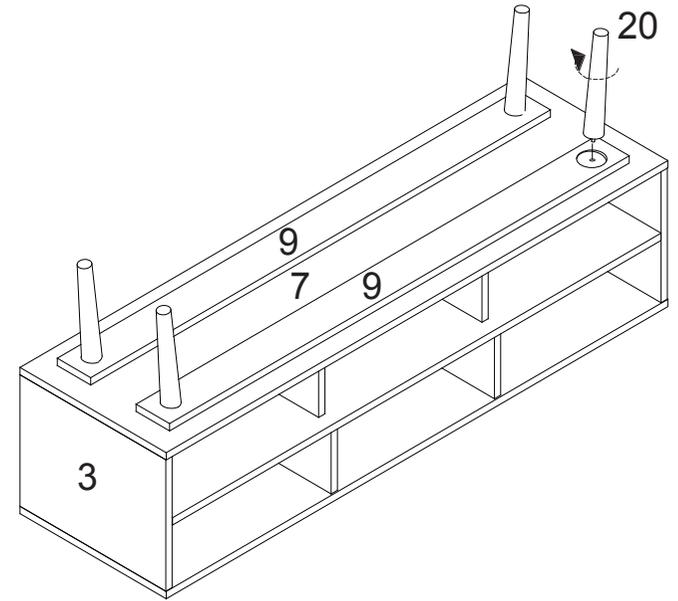

13

Turn the unit the right way up and insert the drawers.

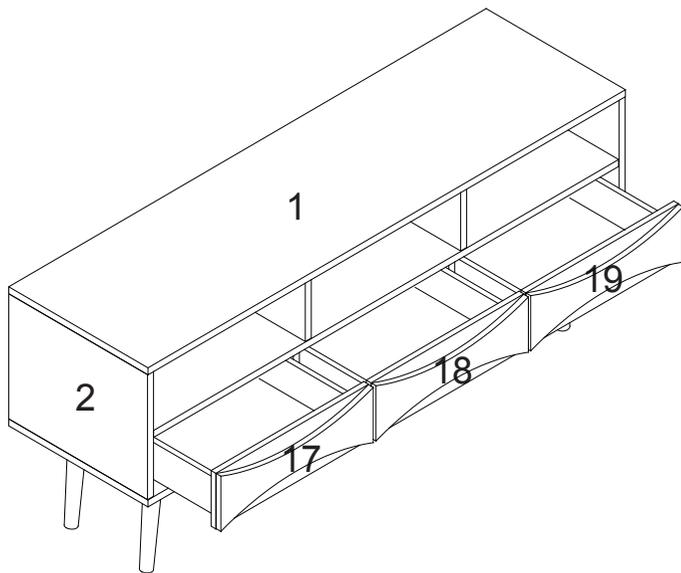

14

The unit should now be assembled and ready to use.

