



# Assembly Instructions

## BABA Flat High Back Office Chair



PLEASE NOTE: Check that you have received all components and hardware before assembling. If you are missing any parts, contact your retailer.







**IMPORTANT NOTE #1:** →  
Screws and washers (Parts I) are preassembled into the underside of the seat (Part B). Remove screws and washers from seat and then use to attach Part D to Part B, as shown in step 1.

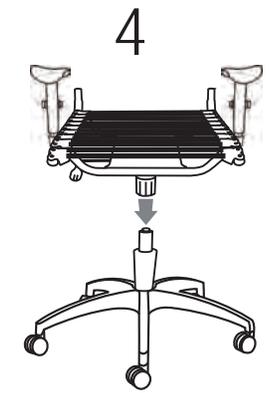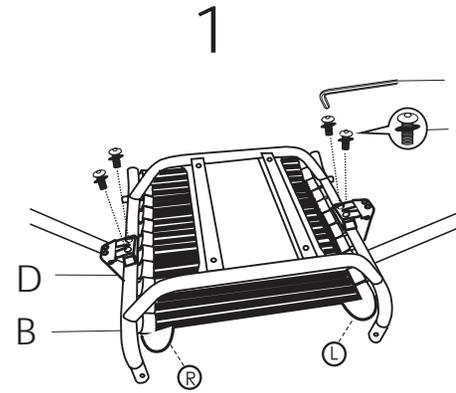

**IMPORTANT NOTE #2:** →  
Screws and washers (Parts G) are preassembled into the underside of the seat (Part B). Remove screws and washers from seat and then use to attach Part C to Part B, as shown in step 2.

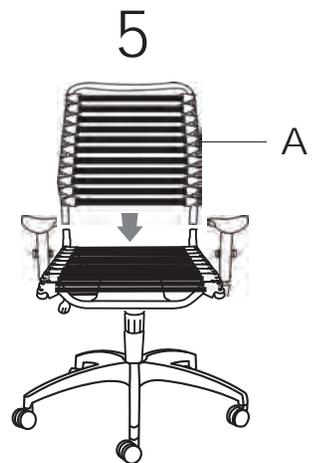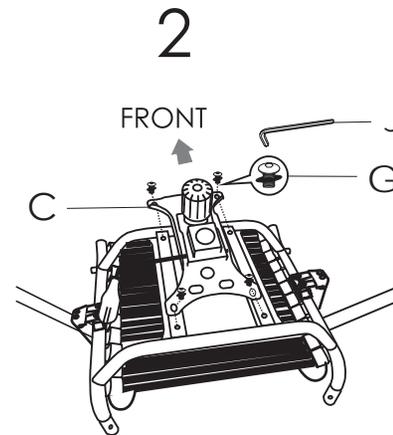

- |  |   |   |
|--|---|---|
|                            |    |                            |
| A (1 pc)   | B (1 pc)  | C (1 pc)  |
|                           |   |                           |
| D (2 pcs)  | E (1 pc)  | F (1 pc)  |
|  * see important note #2 |  |  * see important note #1 |
| G (4 pcs)<br>M8 x 14mm   | H (2 pcs)<br>1/4" x 5/8"  | I (4 pcs)<br>M8 x 16mm  |
|                          |  |   |
| J (1 pc)<br>5mm  | K (1 pc)<br>4mm   |   |

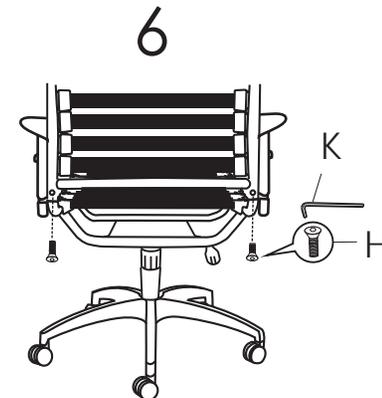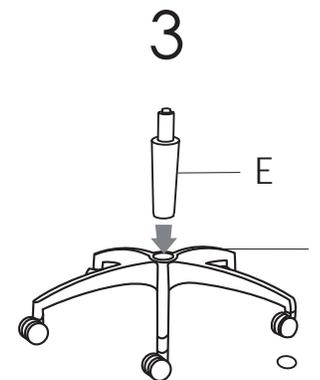


During assembly, hand tighten screws only. When the screws are in place, tighten completely.



# Function Description

PLEASE NOTE: Check that you have received all components and hardware before assembling. If you are missing any parts, contact your retailer.


## 1. To adjust chair height

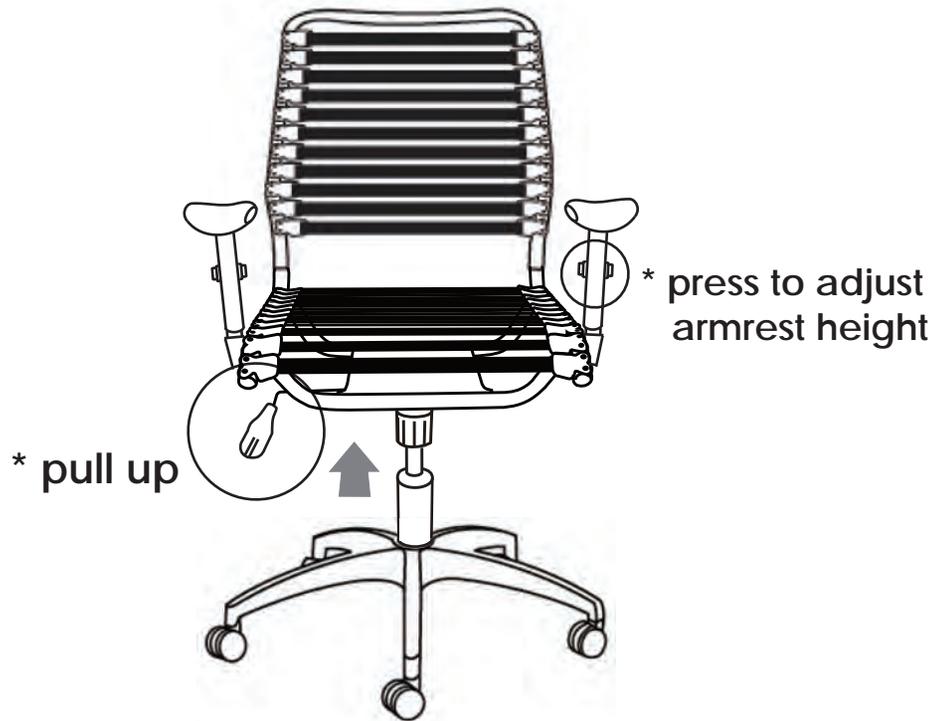

## 2. Chair tilt and lock



## 3. To loosen or tighten chair tilt

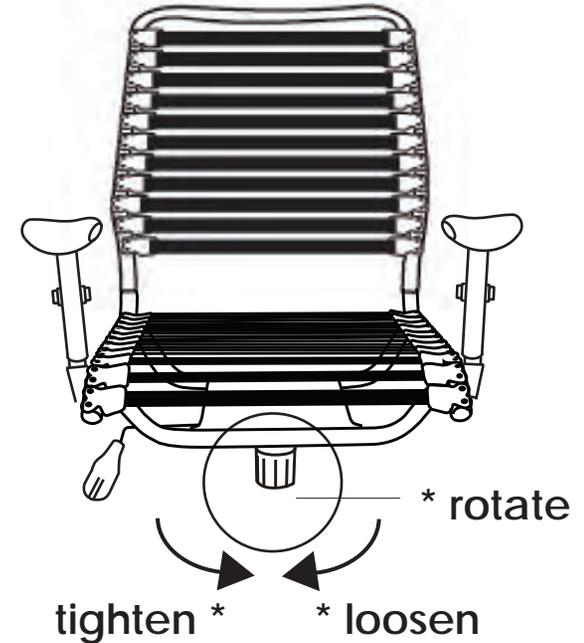

During assembly, hand tighten screws only. When the screws are in place, tighten completely.