

















Assembly Instructions

Axel Adjustable Height Drafting Stool

PLEASE NOTE: Check that you have received all components and hardware before assembling. If you are missing any parts, contact your retailer.




- A (1 pc) 
- B (1 pc) 
- C (1 pc) 
- D (1 pc) 
- E (1 pc) 
- F (5 pcs) 
- G (2 pcs)  Ø6X12mm
- H (6PC)  Ø6 x 30mm
- I (10PC) 
- J (1 pc)  4mm
- K (1 pc)  6mm
- L (4 pcs)  Ø6 x 20mm
- M (10 PCS)  M6
- N (1PC) 
- O (1 pc) 
- P (1 pc) 

Footrest adjustment instructions:

Step A: Slide footrest (N) onto the gas cylinder (D) then adjust footrest to the preferred position.

Step B: Once the footrest is in place, push the bottom of the Central Spring up until its above the Stretcher to lock the footrest into place.

To release the footrest from the locked position, push the top of the Central Spring down until its flush with the Stretcher, then slide the footrest to new preferred position then repeat **Step B**.

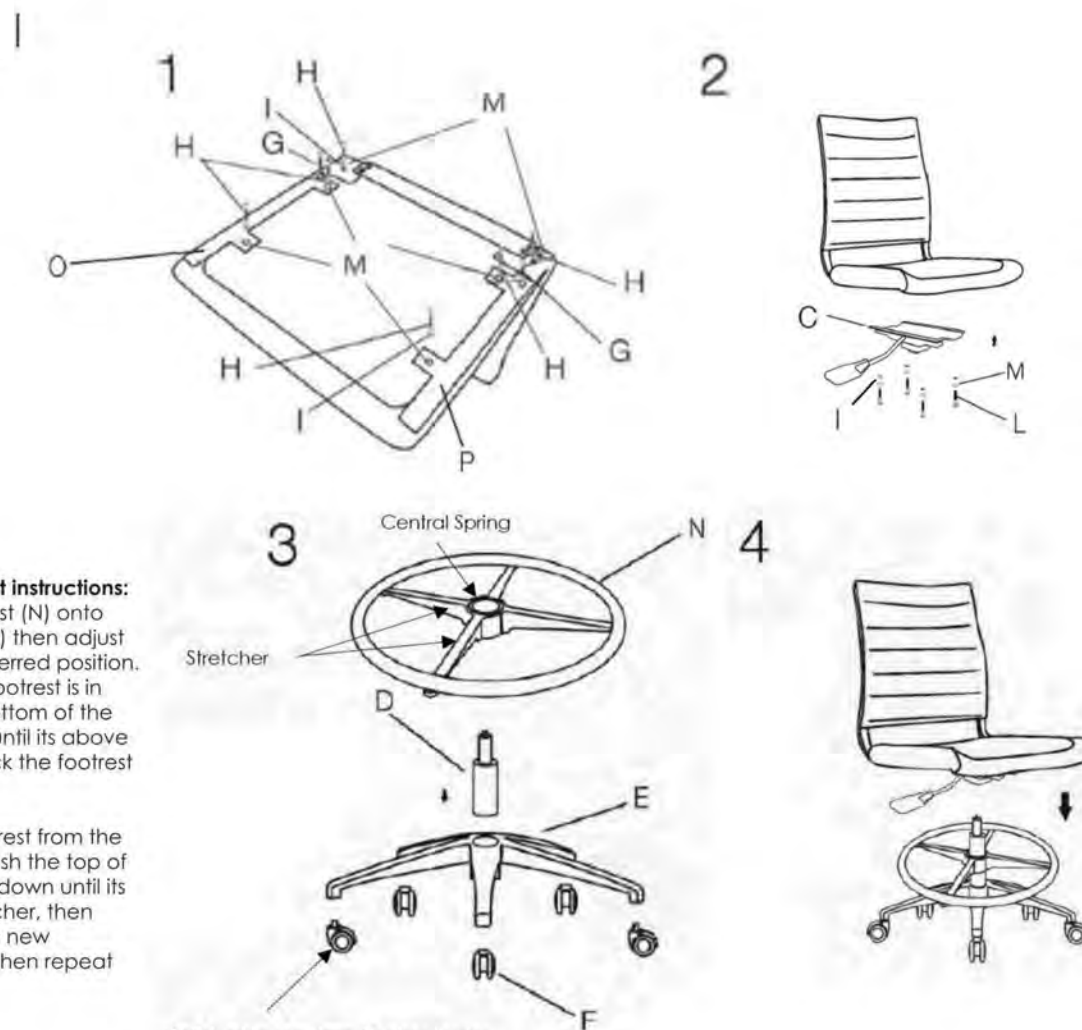

Self-braking casters: Casters brake for safety when user sits on chair. In order to have the chair roll around, simply stand up and the brakes will release for movement.

During assembly, hand tighten screws only. When the screws are in place, tighten completely.

Function Description

Chair height adjustable



During assembly, hand tighten screw only. When the screw is in place, tighten completely.