


STYLE#: 24972

Carefully unpack all Assembly parts from the carton.

1. Take all parts carefully out of the Carton, and place them on a flat surface.

2.Insert the Marble into the top of the Part A. Attach Hex Nut to the threaded rod of Marble. The Flat Washer and Hex Nut are pre-positioned on the Rods. Tighten the Hex Nut by Wrench enclosed in the parts bag.

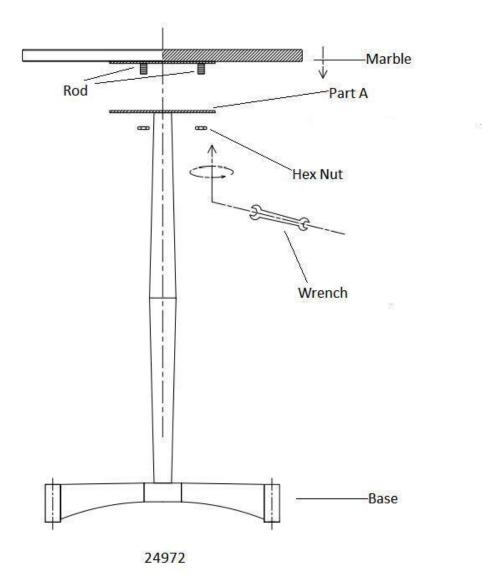

P.O. Box 558 | 3325 Grassy Hill Road | Rocky Mount, VA | 24151 www.uttermost.com