Item #: LEEB3B

Assembly Instructions






Please visit our website for the most current instructions, assembly tips, to report damage or request parts. www.walkeredison.com

Revised 06/2022

General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are wood dowels, screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.



In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.




VI. A Phillips head screwdriver and hammer is required for the assembly of this product.






VII. Power tools should not be used to assemble this product.




Parts List

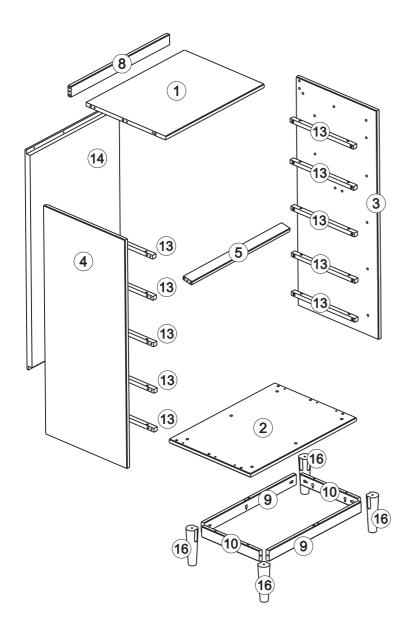



The side drawer with WARNING LABEL, should be mounted in highest drawer.






Part#	Description	Qty
1	Top panel	01 pcs
2	Base panel	01 pcs
3	Right side panel	01 pcs
4	Left side panel	01 pcs
5	Crossbeam	01 pcs
6	Drawer front	05 pcs
7	Drawer back	05 pcs
8	Top crossbeam	01 pcs


Part#	Description	Qty	
9	Bottom front crossbeam	02 pcs	
10	Bottom side crossbeam	02 pcs	
11	Drawer Left Side	05 pcs	
12	Drawer Right Side	05 pcs	
13	Drawer runner	10 pcs	
14	Back panel	01 pcs	
15	Drawer bottom	05 pcs	
16	Leg	04 pcs	

Hardware List

Α		Ø8*20mm	Wood dowel	20 pcs
В		Ø8*30mm	Wood dowel	62 pcs
С	(X))))))))D	Ø3,0*12mm	Screw	18 pcs
D		Ø4,0*25mm	Screw	20 pcs
Е		Ø4,0*30mm	Screw	59 pcs
F		Ø4,0*40mm	Screw	14 pcs
G		Ø7,0*70mm	Screw	04 pcs
Н		-	Hex Key	01 pc
I		-	Glue	01 pc
J		-	Handle	05 pcs
K	Œ 200000	-	Ø6mm	01 pc
L		-	Washer	02 pcs
М		-	Wall anchor	01 pc
N		Ø3,5*20mm	Screw	06 pcs
O	000	-	Corner	04 pcs





Hammer recommended for assembly (not included)





Philips head screwdriver required for assembly (not included)


The hardware quantities listed above are required for proper assembly. Some extra hardware may also have been included.

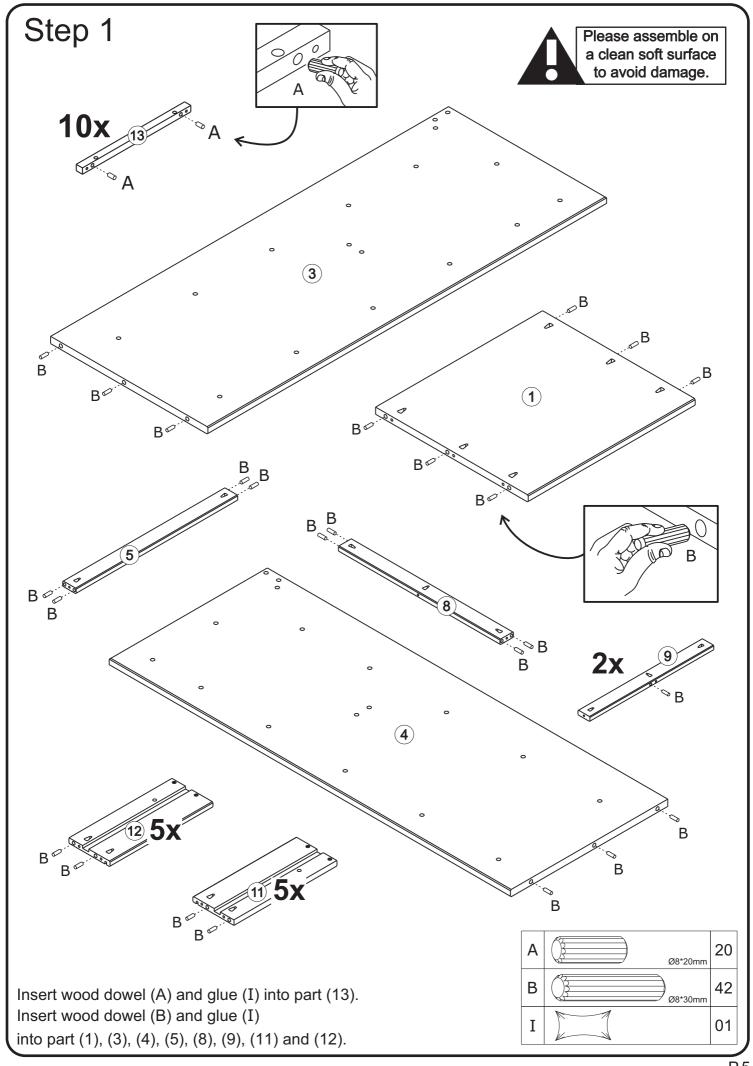


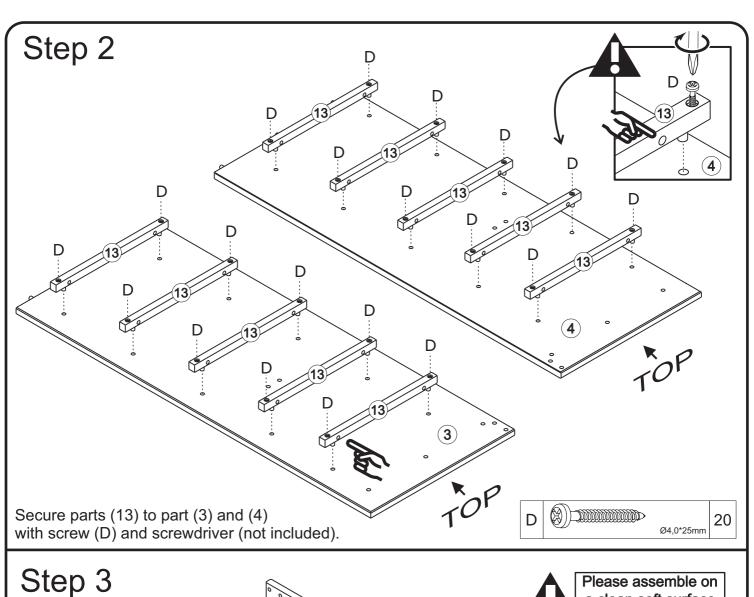

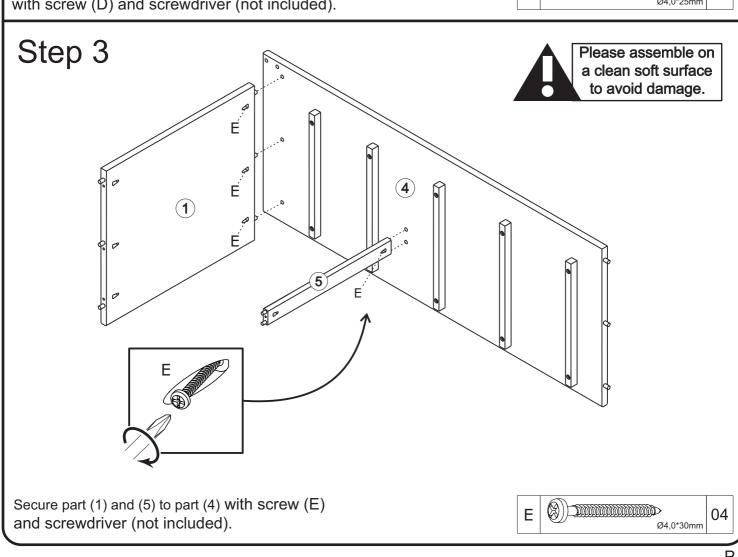


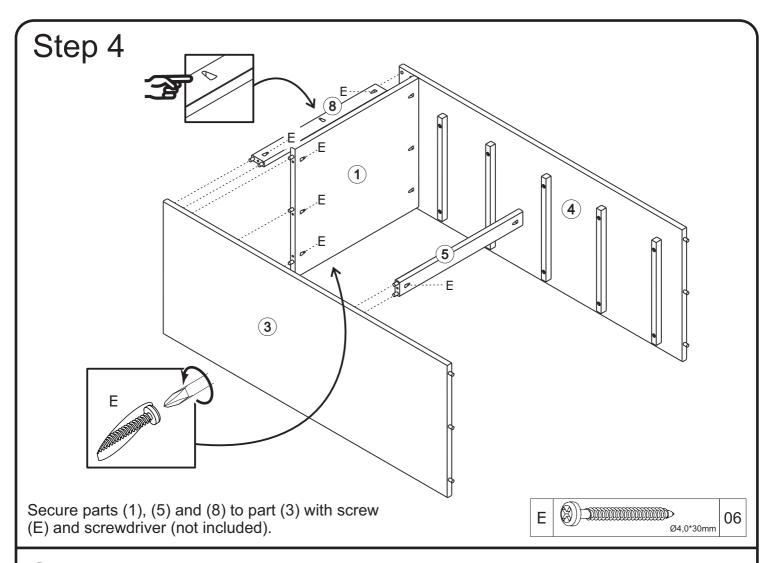

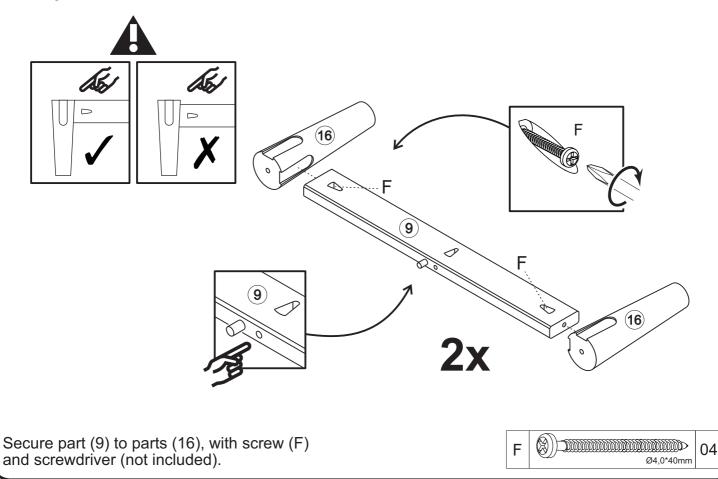


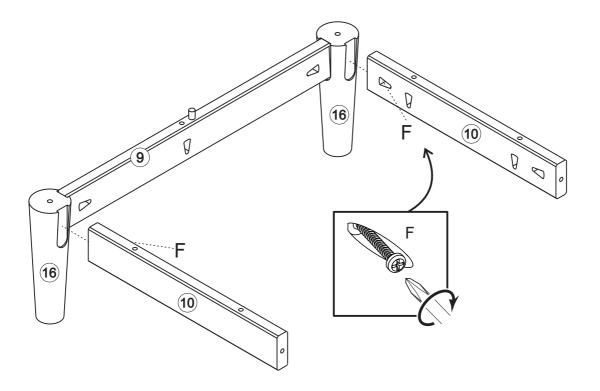


Secure part (10) to parts (16), with screw (F) and screwdriver (not included).





Step 7

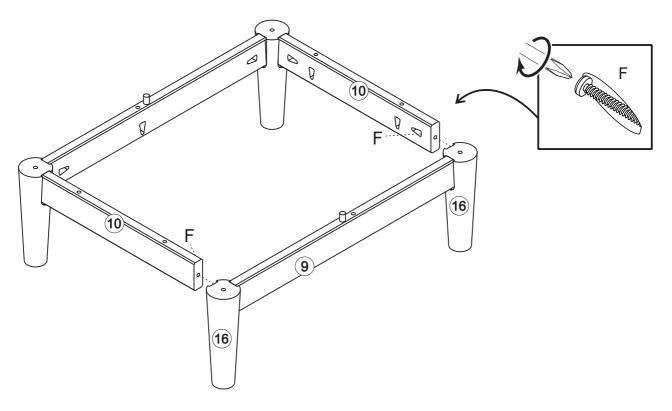



Secure part (10) to parts (16), with screw (F) and screwdriver (not included).

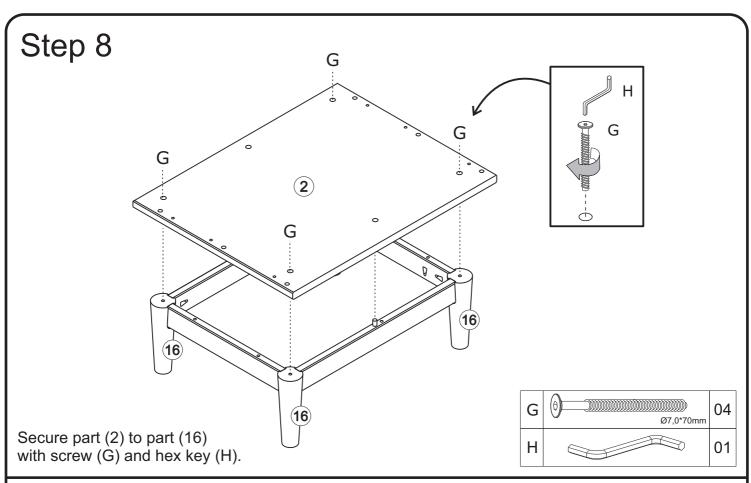


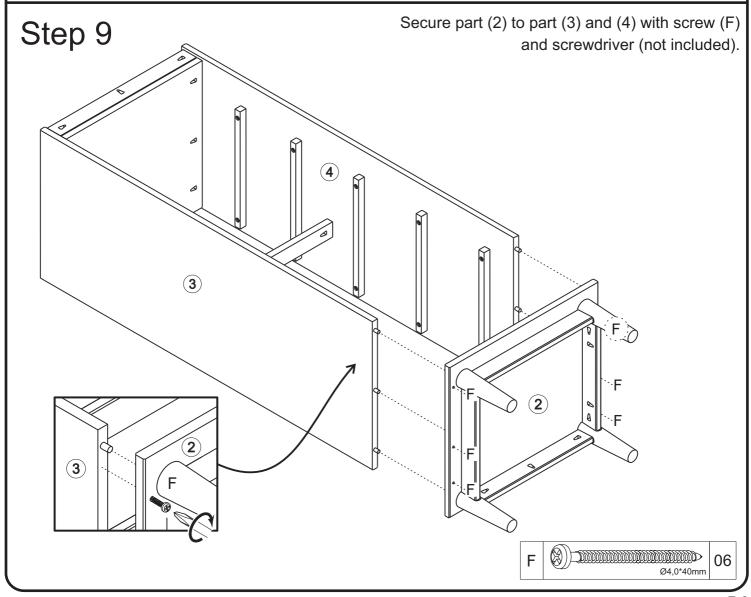


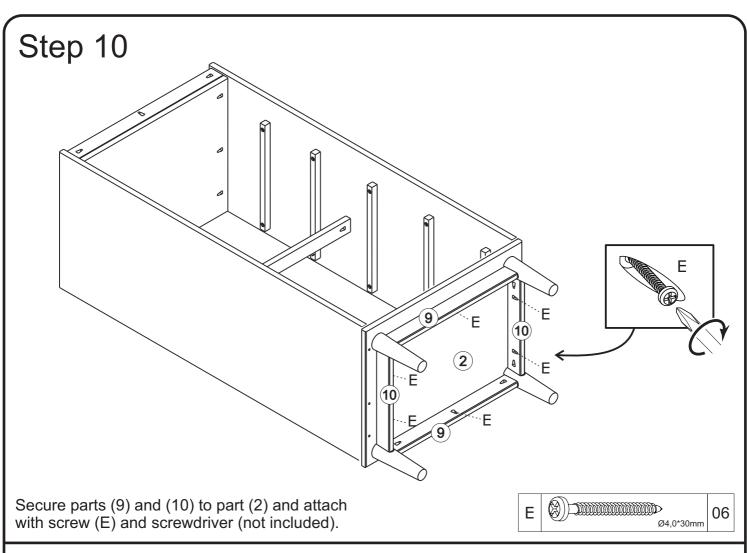


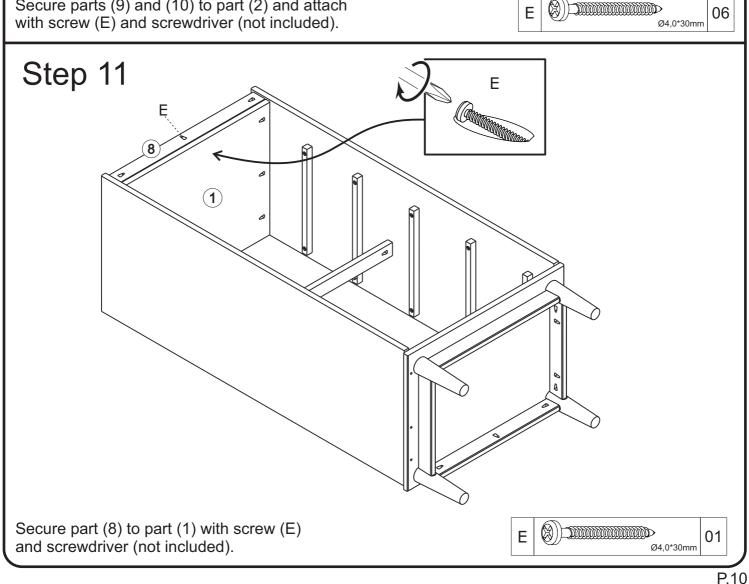


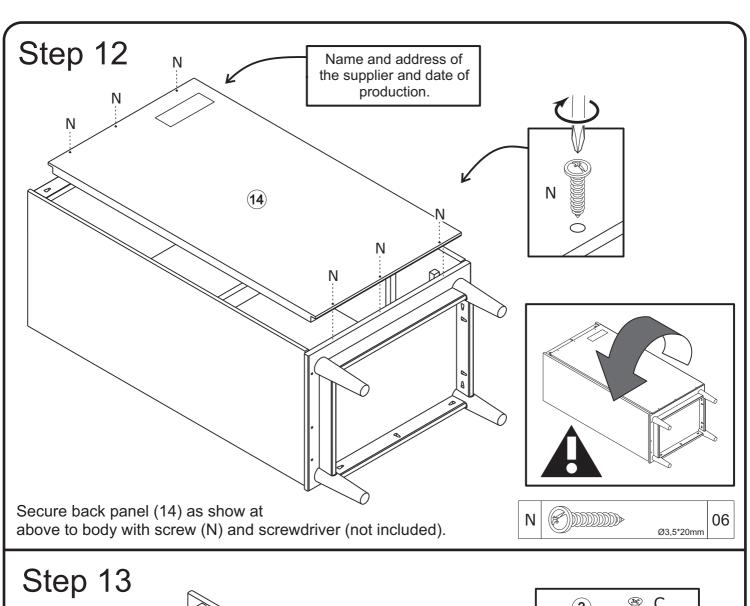

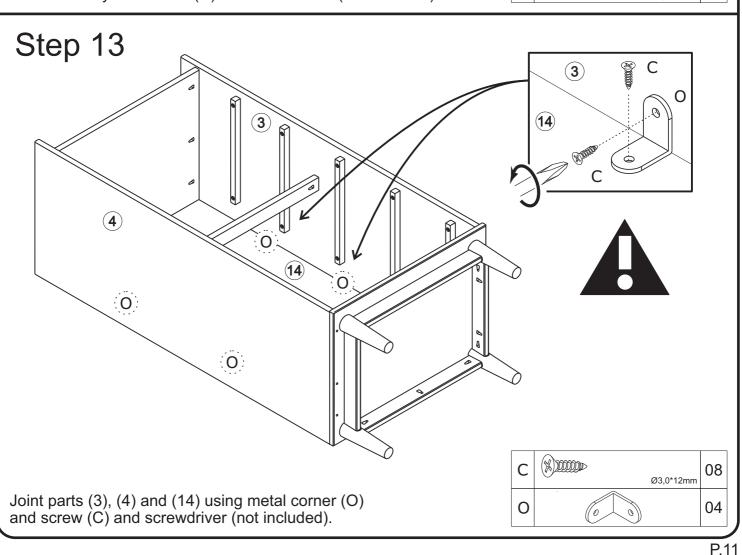

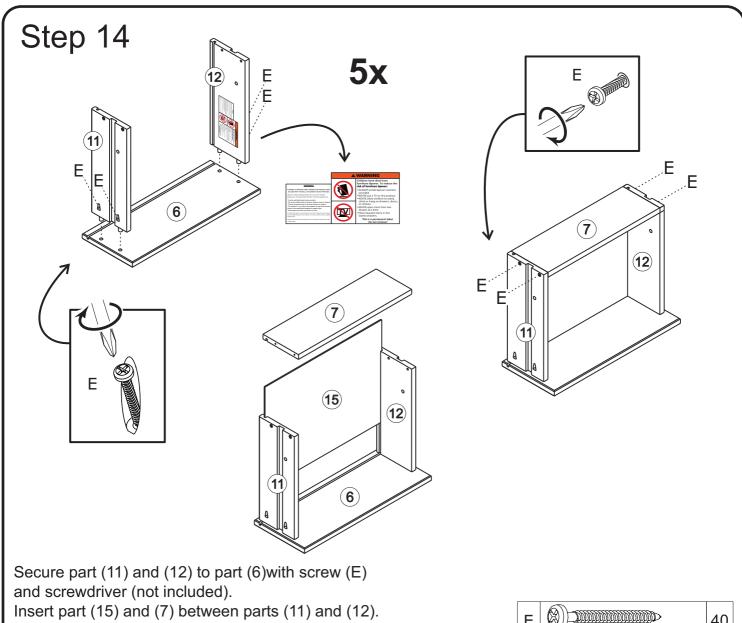

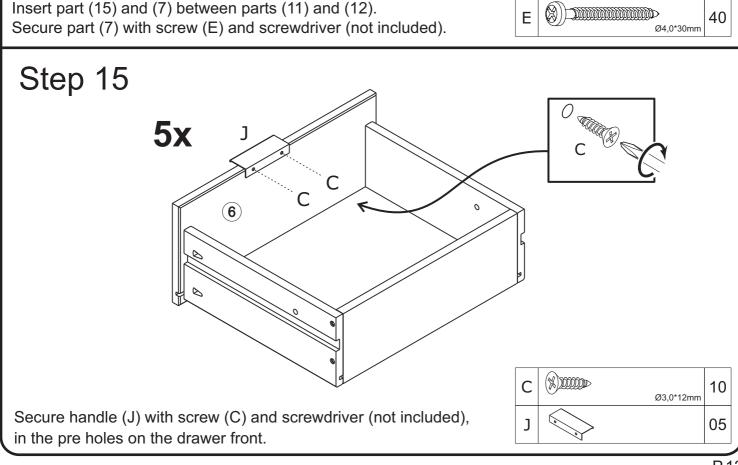

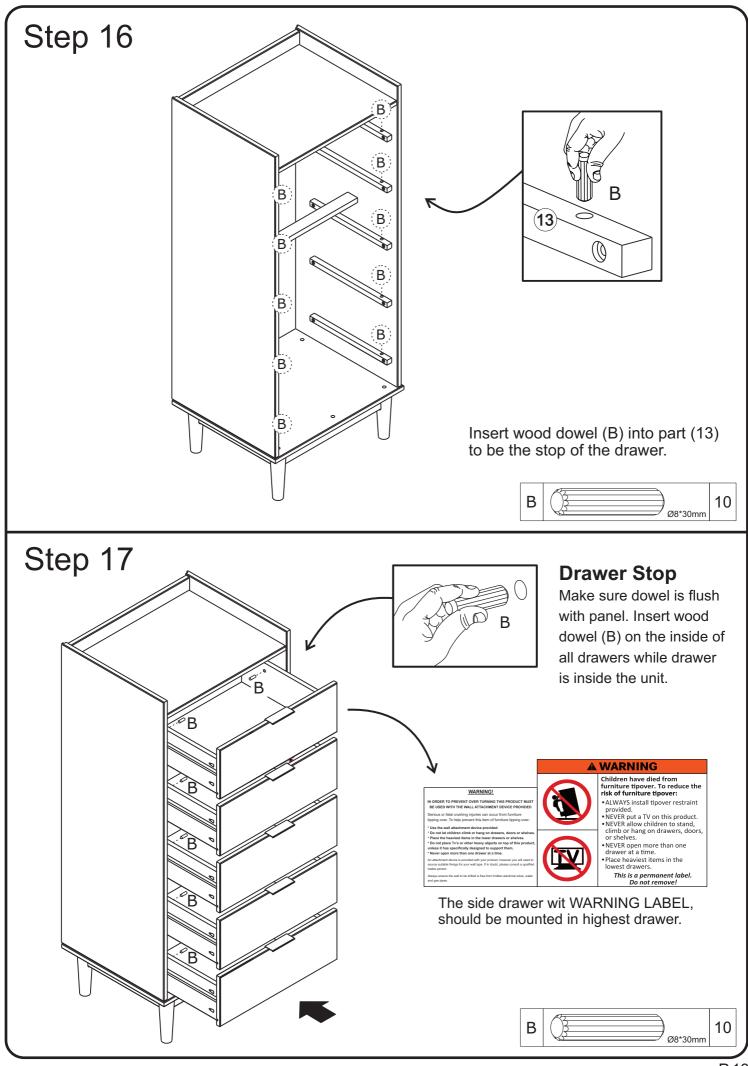


WARNING


Serious or fatal injuries can occur from furniture tipping over. To prevent the furniture from tipping over we recommend that it is permanently fixed to the wall. Wall anchor and hardware are included with this product.


Please make sure hardware is suitable for your walls before installing, as different wall materials may require different types of anchors.

Attach screw (E) into washer (L), securing wall anchor (M) at the top middle part (1).

Drill your wall with a 6mm drill (not included) and insert hardware (K), securing wall anchor (M) gift asher (L) and screw (E) in the wall.






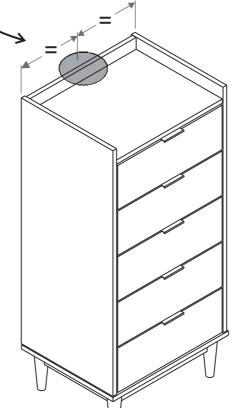

Ø6mm

Name and address information for the manufacturer responsible for the anti-tip hardware and date of production can be found on the label on the back of the furniture.

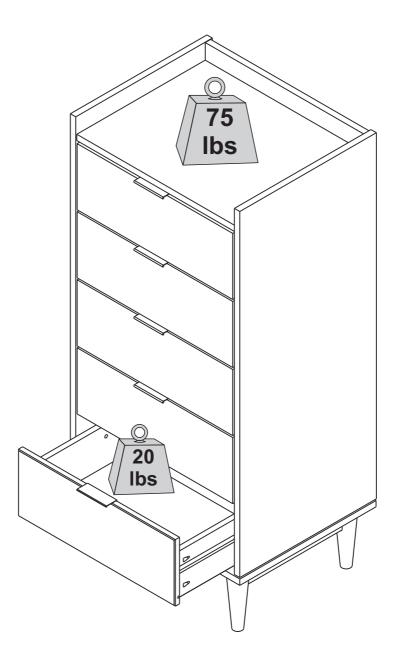

Assembly Complete!

Maintenance Guide

To maintain long term performance and easy gliding of your solid wood drawers, we recommend applying wax to the wooden guide rails.

- 1.Bee's wax is recommended or Paraffin wax from a standard candle can be used.
- 2.Apply the wax by rubbing it on the wooden guide rails where there is wood-on-wood contact when opening and closing the drawer. (Wax should be room temperature, do not melt the wax onto the wood)
- 3. Wax should be applied every few months for the first year and then only when needed after that to keep the drawers sliding smoothly.