Item #: LEEBD

Assembly Instructions






Please visit our website for the most current instructions, assembly tips, to report damage or request parts. www.walkeredison.com

Revised 06/2022

General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are wood dowels, screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.



In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.





VI. A Phillips head screwdriver and hammer is required for the assembly of this product.





VII. Power tools should not be used to assemble this product.



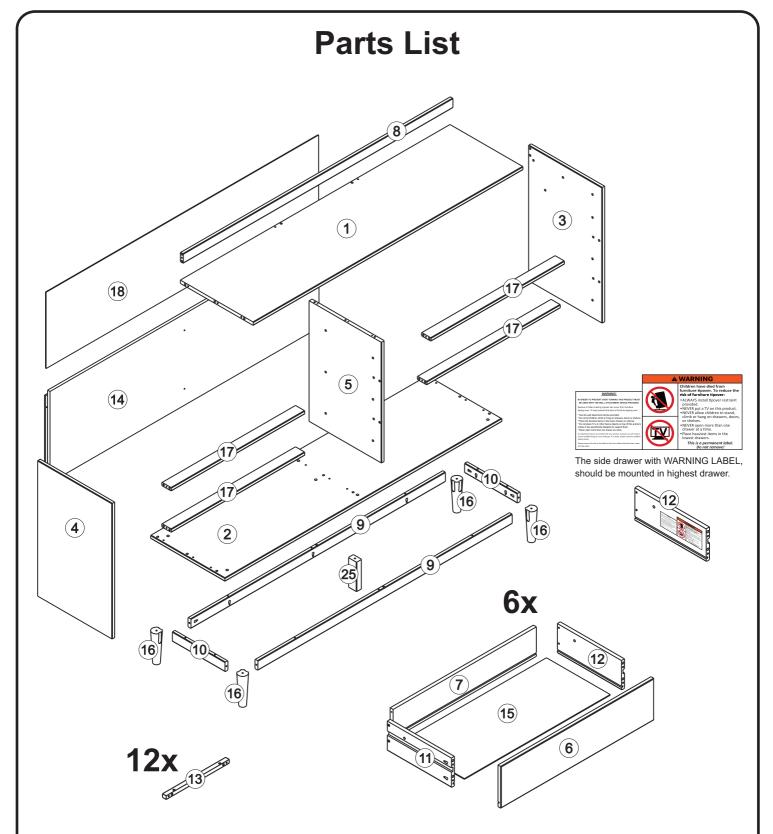


Part#	Description	Qty
1	Top panel	01 pcs
2	Base panel	01 pcs
3	Right side panel	01 pcs
4	Left side panel	01 pcs
5	Middle panel	01 pcs
6	Drawer front	06 pcs

Part#	Description	Qty
7	7 Drawer back	
8	Top crossbeam	01 pcs
9	Bottom front crossbeam	02 pcs
10	Bottom side crossbeam	02 pcs
11	Drawer left side	06 pcs
12	Drawer right side	06 pcs


Part#	Description	Qty
13	Drawer runner	12 pcs
14	Back panel low	01 pcs
15	Drawer bottom	06 pcs
16	Leg	04 pcs
17	Front crossbeam	04 pcs
18	Back panel up	01 pcs
25	Central Leg	01 pcs

Hardware List

Α		Ø8*20mm	Wood dowel	24 pcs
В		Ø8*30mm	Wood dowel	90 pcs
С	(X)))))))))	Ø3,0*12mm	Screw	24 pcs
D		Ø4,0*25mm	Screw	24 pcs
Е		Ø4,0*30mm	Screw	83 pcs
F		Ø4,0*40mm	Screw	17 pcs
G		Ø7,0*70mm	Screw	05 pcs
Н		-	Hex Key	01 pc
I		-	Glue	01 pc
J		-	Handle	12 pcs
K	O 2000000	-	Ø6mm	01 pc
L		-	Washer	02 pcs
М		-	Wall anchor	01 pc
N		Ø3,5*20mm	Screw	04 pcs
0		Ø8,0*8mm	Nail	24 pc





Hammer recommended for assembly (not included)





Philips head screwdriver required for assembly (not included)


The hardware quantities listed above are required for proper assembly. Some extra hardware may also have been included.

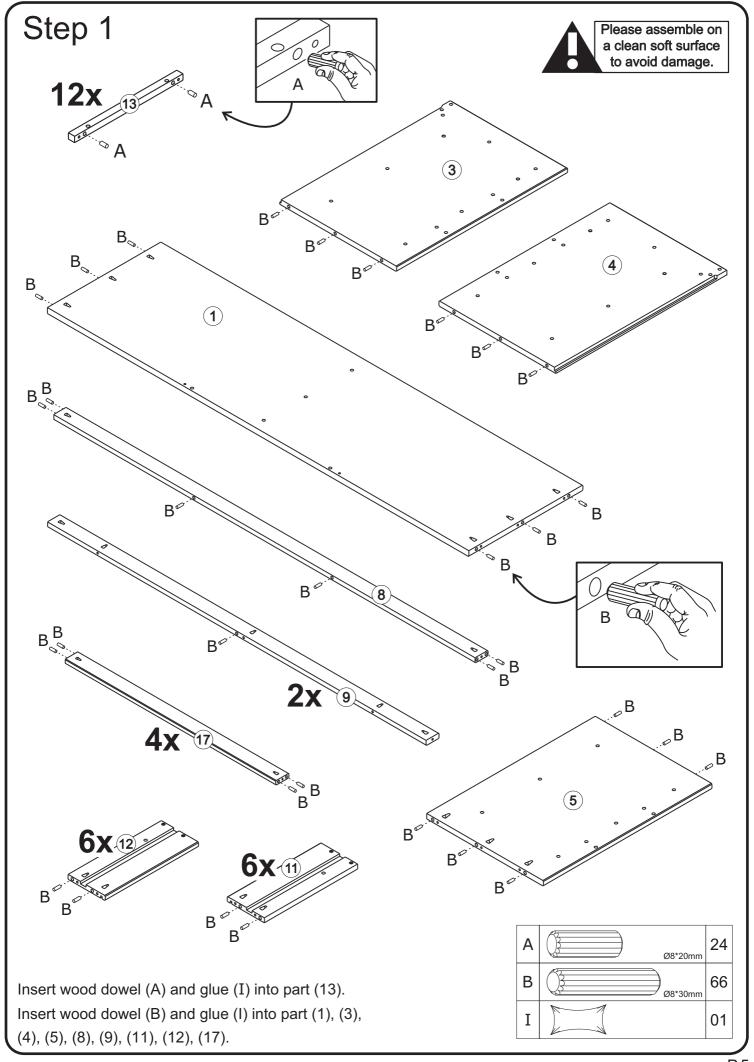


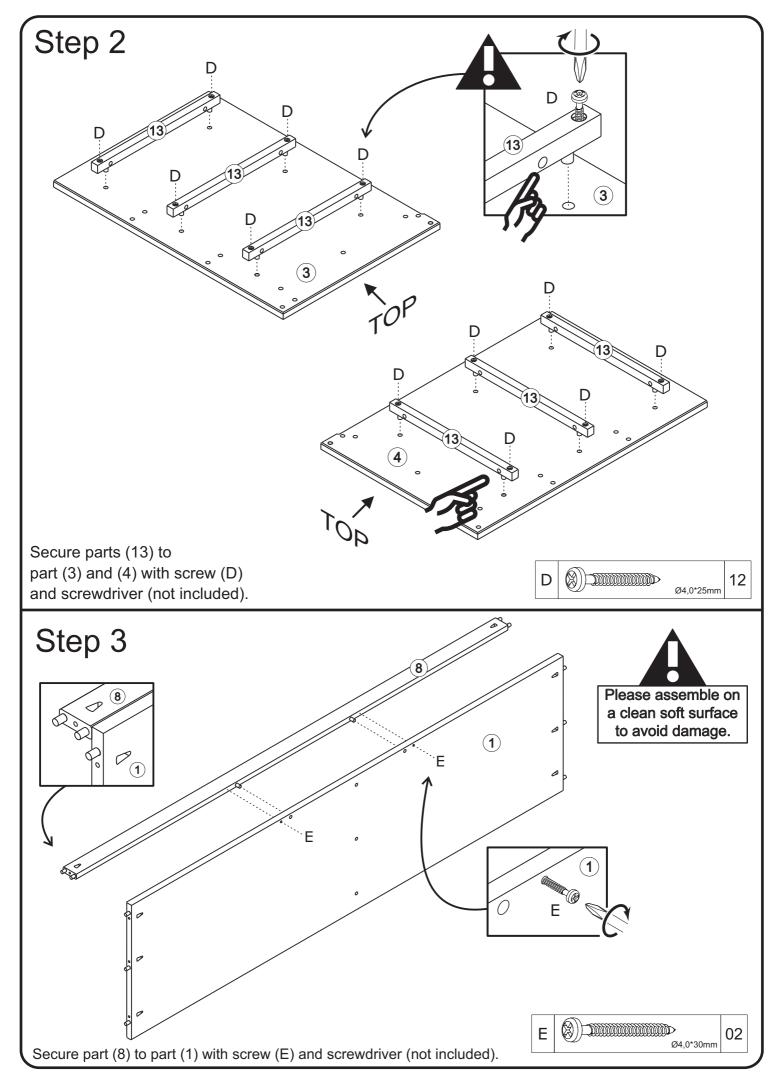


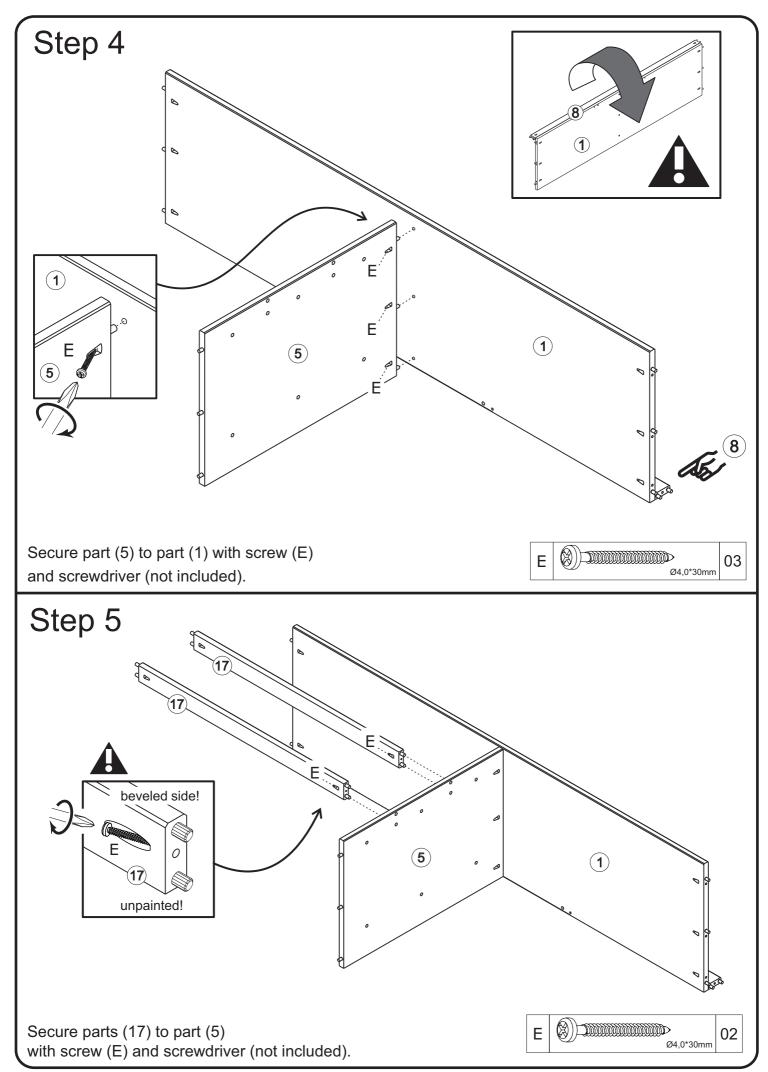


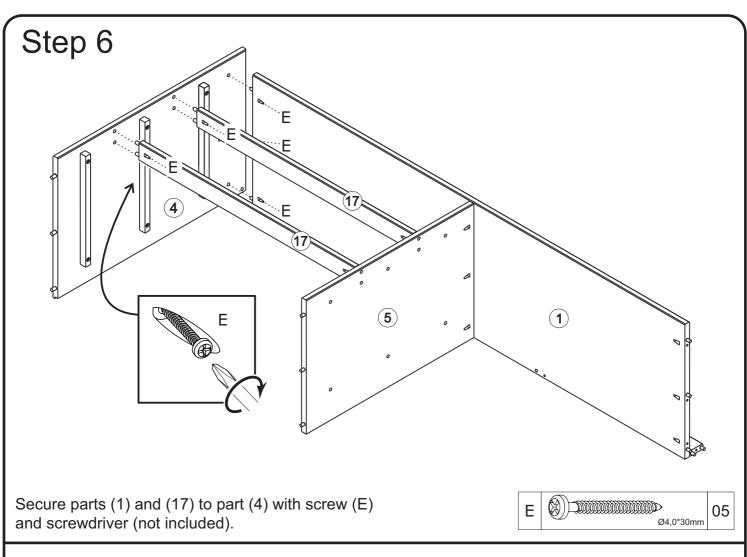


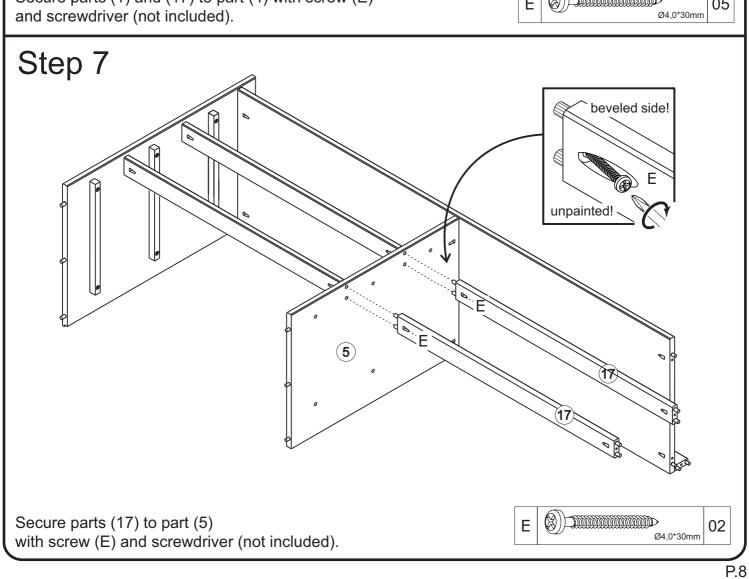


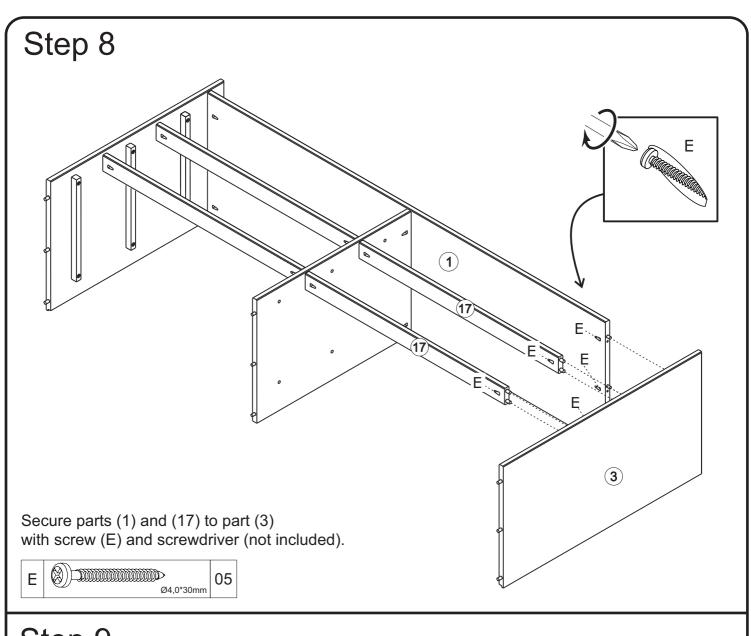


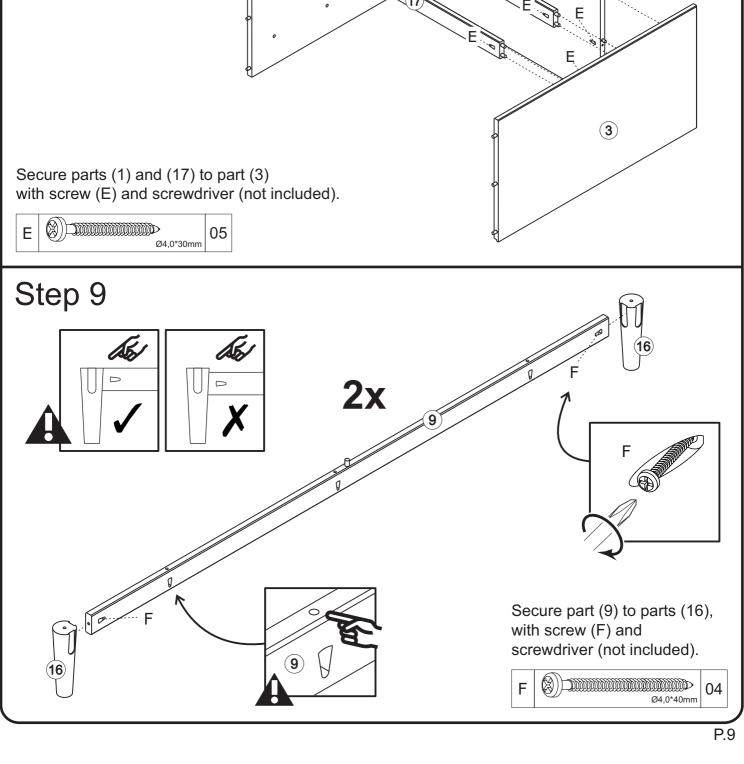


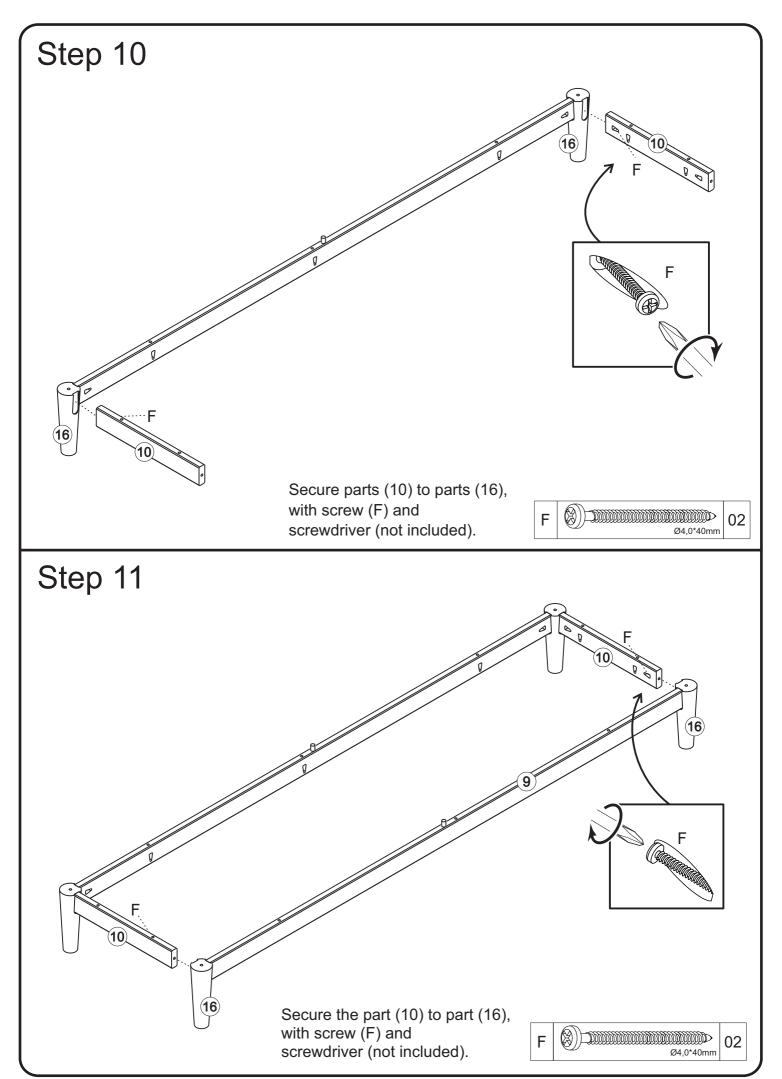


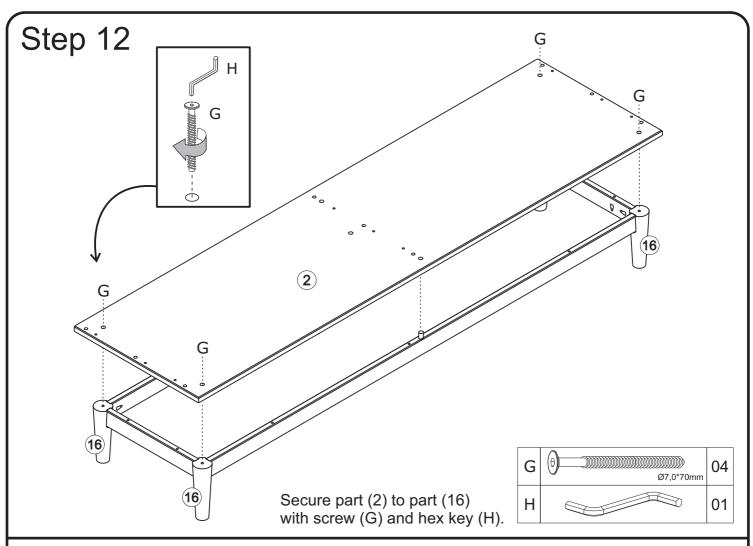


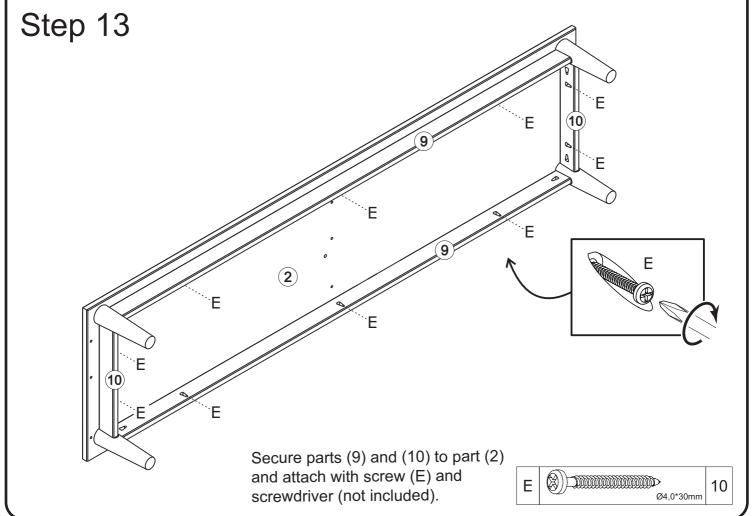


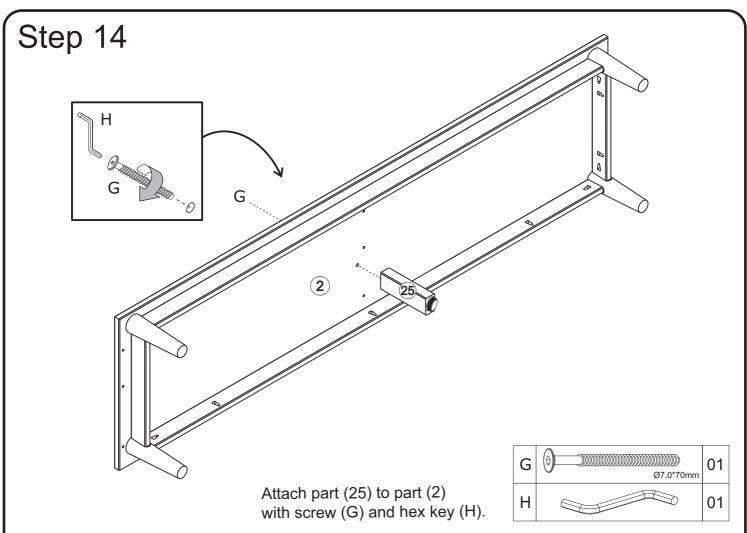


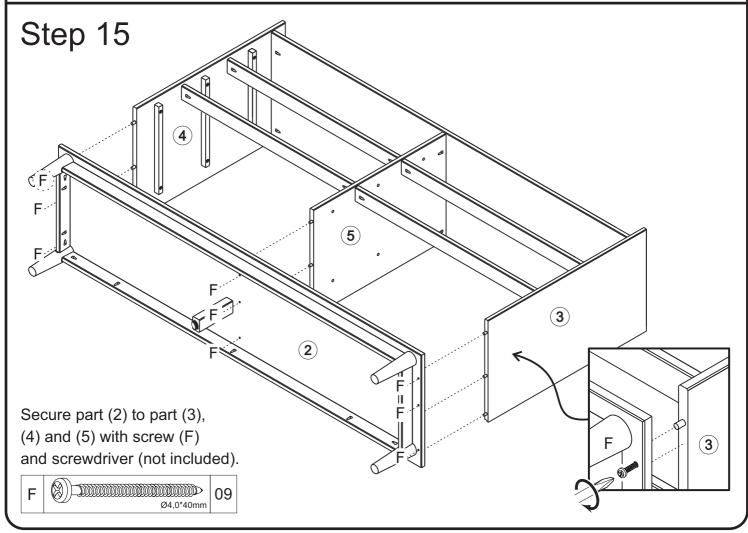

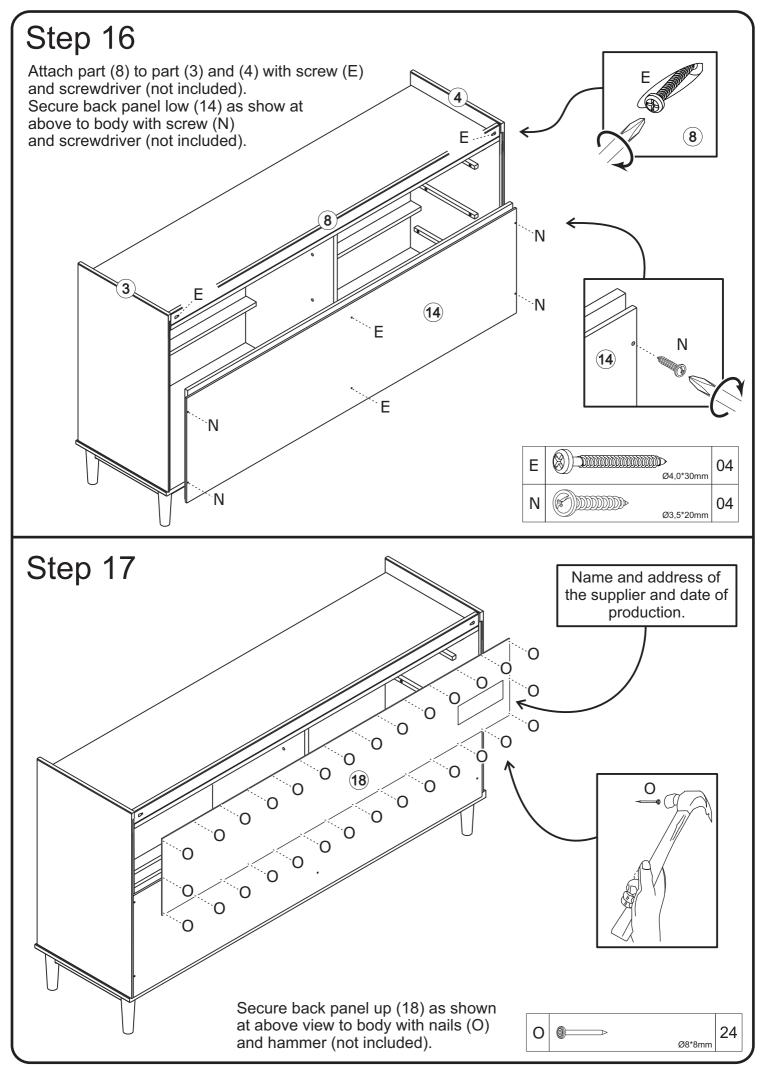

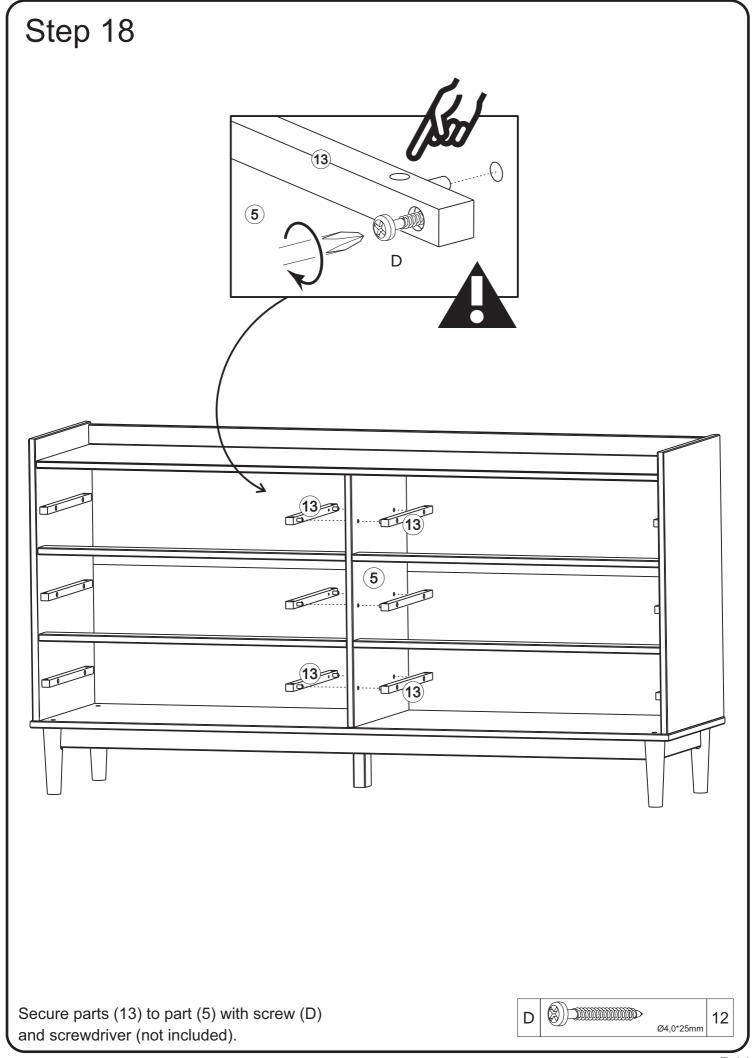

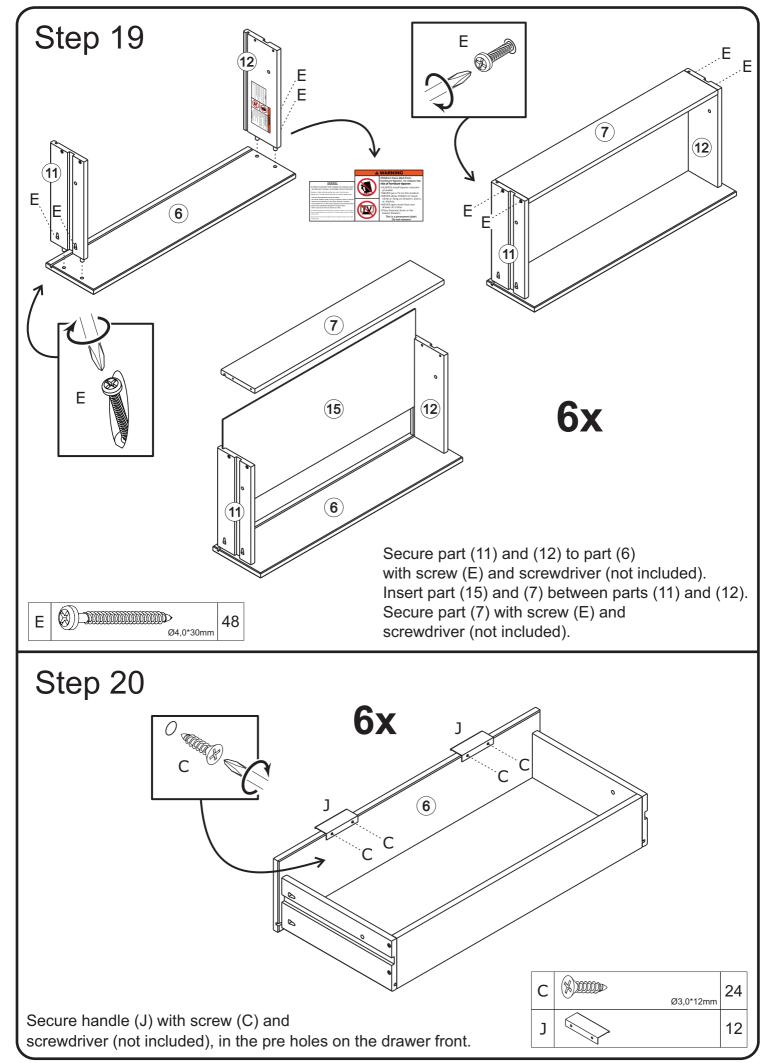

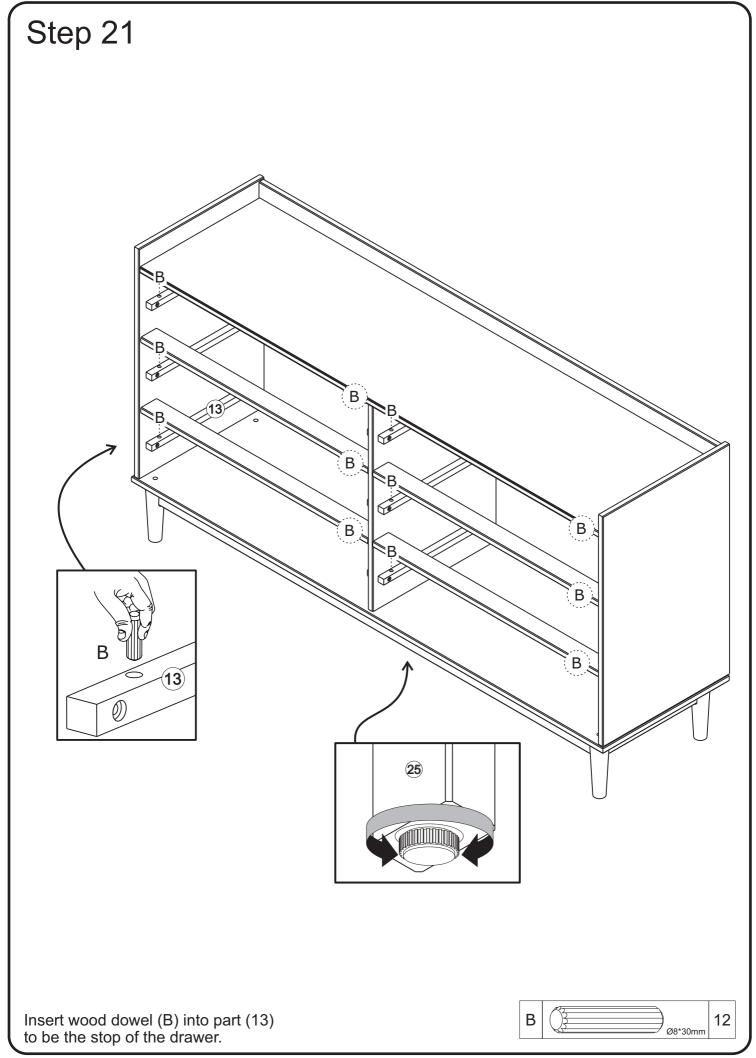


Step 22

Drawer Stop

Make sure dowel is flush with panel.

Insert wood dowel (B) on the inside of all drawers while drawer is inside the unit.

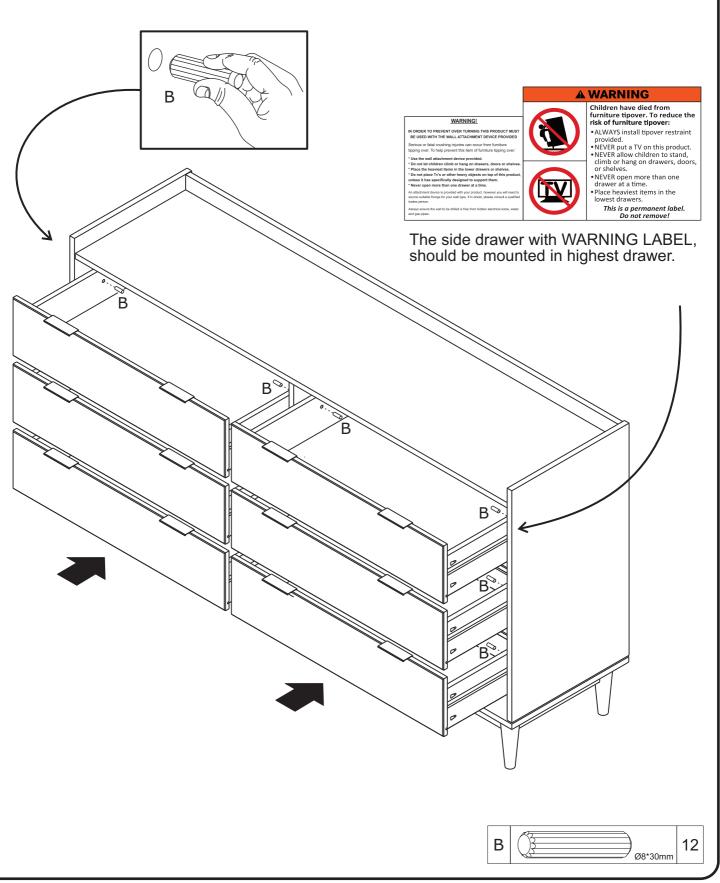

Step 23


WARNING


Serious or fatal injuries can occur from furniture tipping over. To prevent the furniture from tipping over we recommend that it is permanently fixed to the wall. Wall anchor and hardware are included with this product.


Please make sure hardware is suitable for your walls before installing, as different wall materials may require different types of anchors.


Attach screw (E) into washer (L), securing wall anchor (M) at the top middle part (1).

Drill your wall with a 6mm drill (not included) and insert hardware (K), securing wall anchor (M) gift asher (L) and screw (E) in the wall.





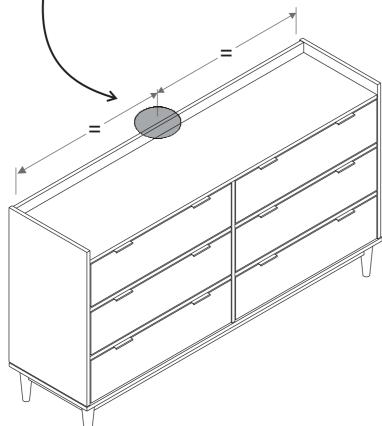



Е	Ø4,0*30mm	02
K	(E 200000)	01
L		02
М		01

Name and address information for the manufacturer responsible for the anti-tip hardware and date of production can be found on the label on the back of the furniture.



Assembly Complete!

Maintenance Guide

To maintain long term performance and easy gliding of your solid wood drawers, we recommend applying wax to the wooden guide rails.

- 1.Bee's wax is recommended or Paraffin wax from a standard candle can be used.
- 2.Apply the wax by rubbing it on the wooden guide rails where there is wood-on-wood contact when opening and closing the drawer. (Wax should be room temperature, do not melt the wax onto the wood)
- 3. Wax should be applied every few months for the first year and then only when needed after that to keep the drawers sliding smoothly.