


# ASSEMBLY INSTRUCTION


## SH445BGE-A/B & SH445BLU-A/B & SH445GRY-A/B & SH445DGR-A/B & SH445PNK-A/B

**1** Back Rest




x1

**2** Left Arm




x1

**3** Right Arm




x1

**4** Front Side Rail




x1

**5** Back Side Rail




x1

**6** Legs




x4

**7** Daybed Slat




x2

**8** Trundle Front Rail




x1

**9** Trundle Back Rail




x1

**10** Trundle Side Rail




x2

**11** Slats




x3

**12** Trundle Slat




x2

**13** Castors




x6

**A** Bolts  
M8 x 20mm




x16

**B** Bolts  
M6 x 50mm



x16

**C** Bolts  
M6 x 60mm



x4

**D** Lock Washers



x16

**E** Flat Washers



x4

**F** Flat Washer  
(Small)



x12

**G** Screws  
M4 x 32mm



x16

**H** Screws  
M4 x 16mm



x24

**I** Allen Key  
M4 x 65mm




x1

**J** Allen Key  
M5 x 65mm



x1

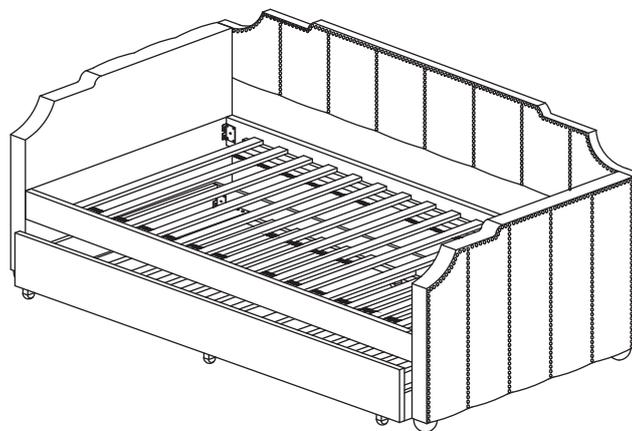


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


# ASSEMBLY INSTRUCTION

## SH445BGE-A/B & SH445BLU-A/B & SH445GRY-A/B & SH445DGR-A/B & SH445PNK-A/B


**1** Begin assembly by attaching each Leg (6) to the bottom of the Left Arm (2) & Right Arm (3) securing with 2 Allen Bolt (B) per panel.

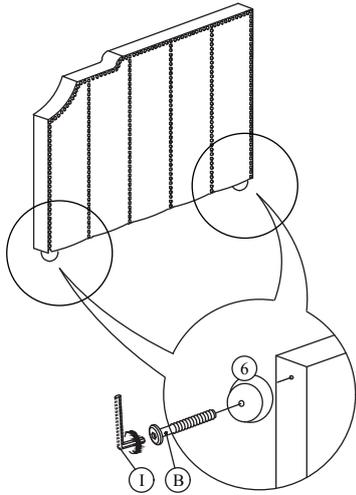


**2** Attach the Front Rail (4) and Back Rail (5) to the Left Arm (2) & Right Arm (3) aligning holes and securing with 2 Allen Bolts (A) per each end. (DO NOT FULLY TIGHTEN BOLTS FOR THIS STEP)

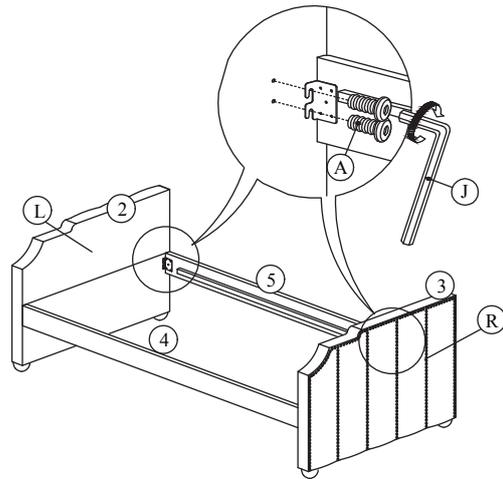

**3** Attach the Back Rest (1) to the back of Left Arm (2) & Right Arm (3) by aligning the hole and securing with 2 Allen Bolt (C), 2 Spring Washer (D), 2 Flat Washer (E) from the back side per each end. (DO NOT FULLY TIGHTEN BOLTS FOR THIS STEP)

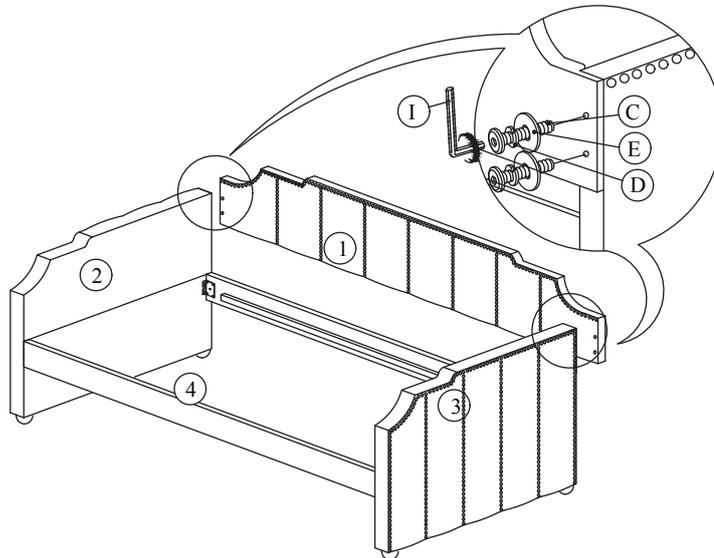

**4** Tighten all bolts from STEP 2 using the Allen Wrench (J) that has been provided. Now only tighten bolts for STEP 3 using Allen Wrench (I). Attach Slat (7) to Front Rail (4) and Back Rail (5) by unrolling and securing with 4 Wood Screws (G) 2 per each side. Tighten all screws using philips head screwdriver (not included)

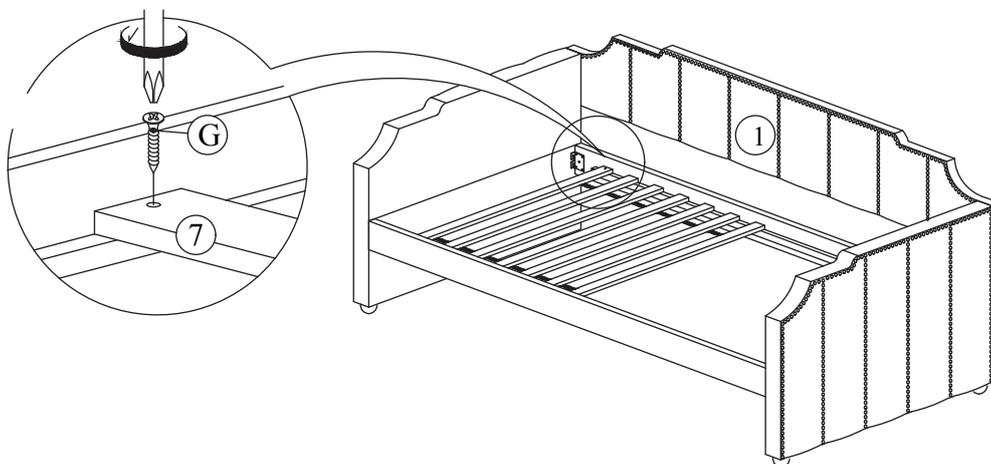


### Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.


# ASSEMBLY INSTRUCTION

## SH445BGE-A/B & SH445BLU-A/B & SH445GRY-A/B & SH445DGR-A/B & SH445PNK-A/B


**1** Begin assembly by tracing around the Castors (13) on to the Slats (11). Secure Castors (13) to Slats (11) using 4 Wood Screws (H) per castor. Tighten screws with Philips screwdriver (not included).

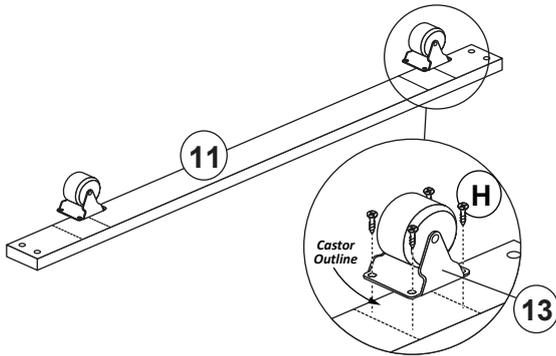


**2** Attach Side Rails (10) to Front Rail (8) and Back Rail (9) using 2 Bolts (A) per corner. Tighten bolts with Allen Key (J) provided.

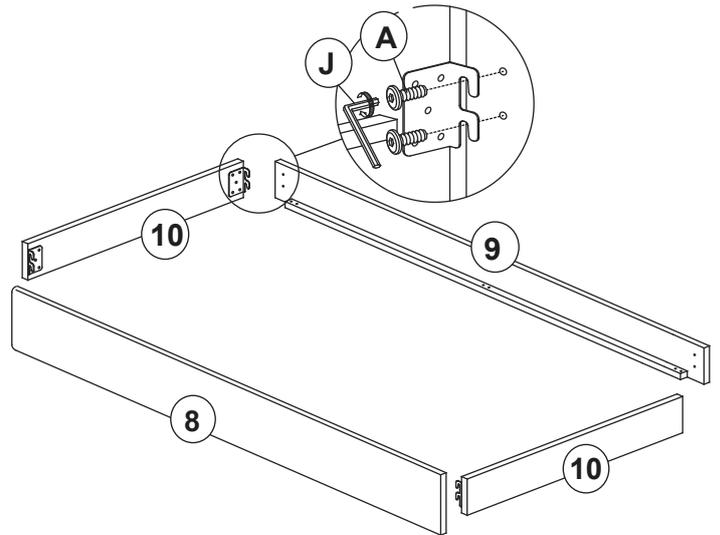

**3** Attach Slats (11) to Front Rail (8) and Back Rail (9) using 2 Bolts (B), 2 Spring Washers (D) and 2 Flat Washers (F) on each end of each Slat (11).

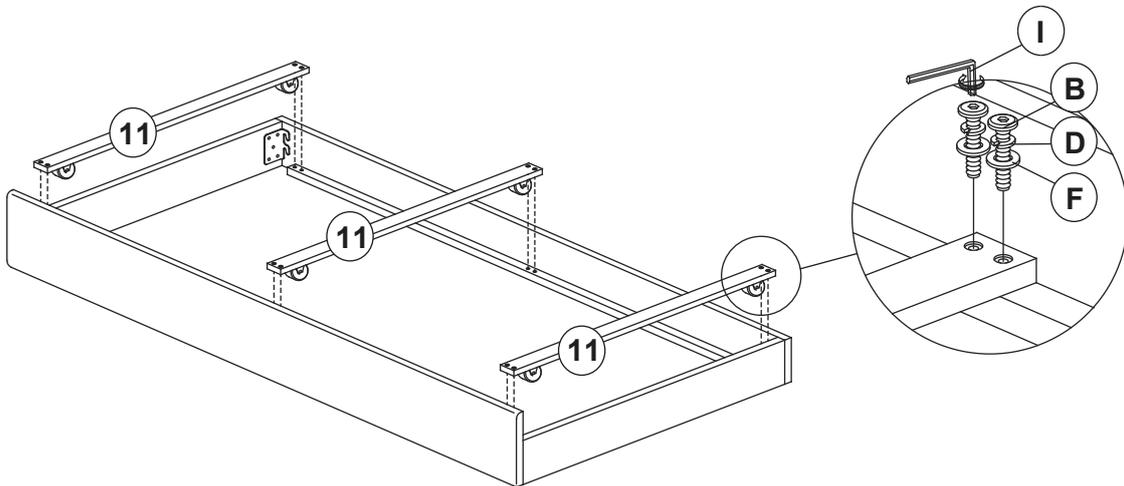

**4** Attach Slat Sets (12) to Front Rail (8) and Back Rail (9) using 4 Screws (G) per set. Tighten screws with Philips screwdriver (not included).

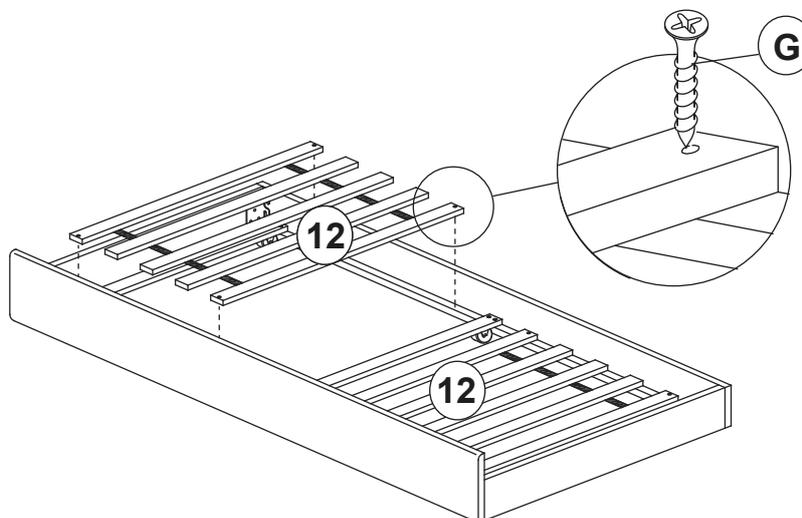

### Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.