


ASSEMBLY INSTRUCTIONS for CHANGING TABLE

LIVIA

Model # 27866

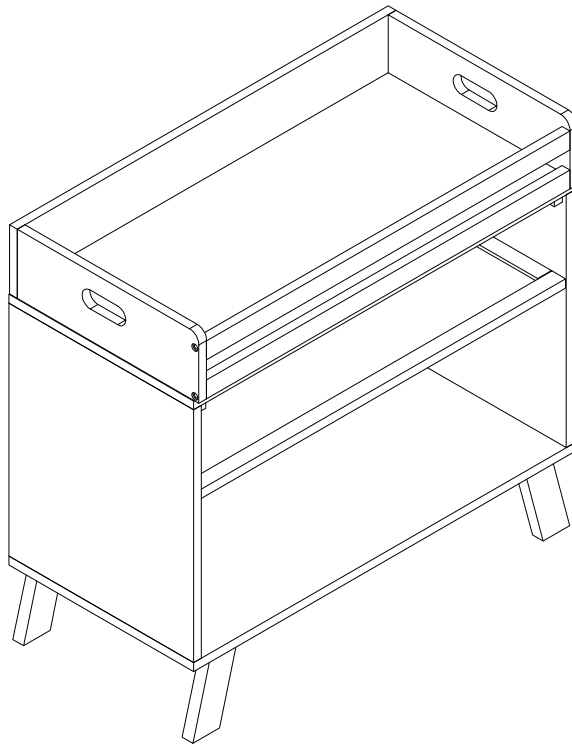


suitebébé

"THE PRODUCT IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT."


Carefully remove and lay out all parts. Familiarize yourself with all exhibits and diagrams to facilitate the assembly of your Changing Table

TOOLS REQUIRED :

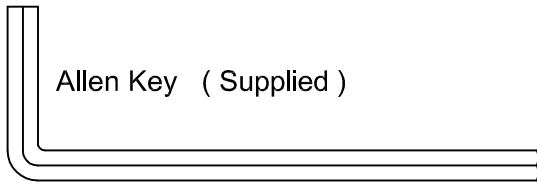


Allen Key (Supplied)

Phillip Head Screw Driver (Unsupplied)




PART ENCLOSED IN CARTON


A. BACK PIECE (1 pc)

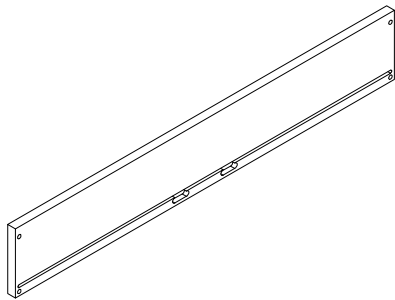


D. SIDE PIECE LEFT - RIGHT (2 pcs)




B. FRONT PIECE (TOP) (1 pc)

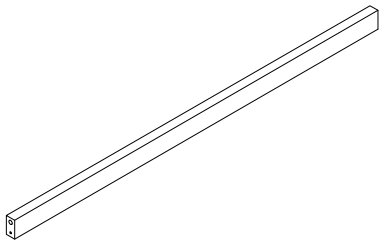


E. CHANGER SUPPORT (2 pcs)



C. FRONT PIECE (BOTTOM) (1 pc)

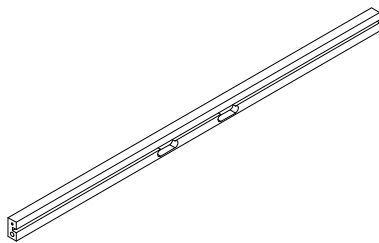


F. CHANGER BOTTOM (1 pc)

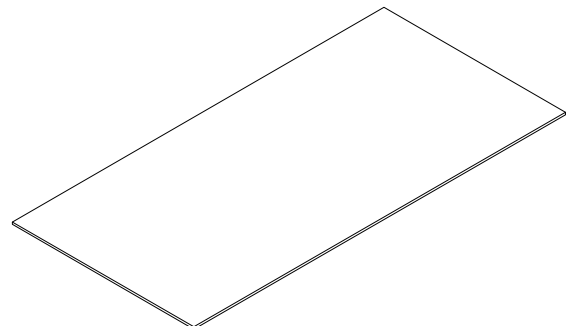


PART ENCLOSED IN CARTON


G .TABLE TOP (1 pc)

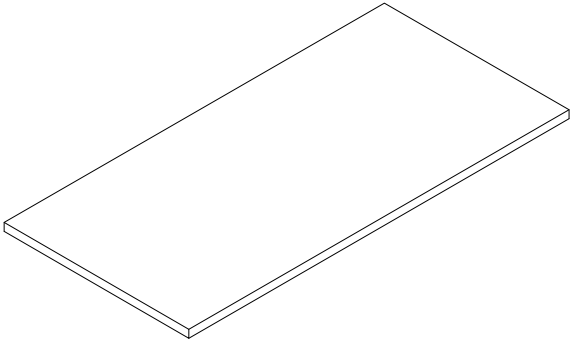


L. BACK PANEL (1 pc)

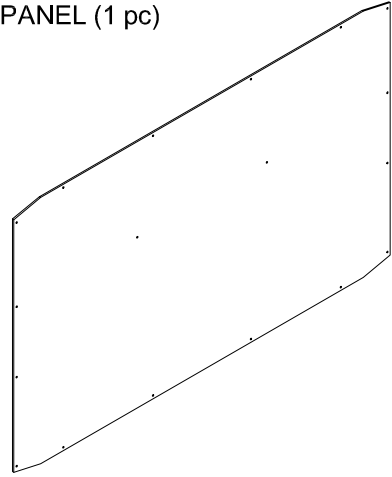


H .FIXED SHELF (1 pc)

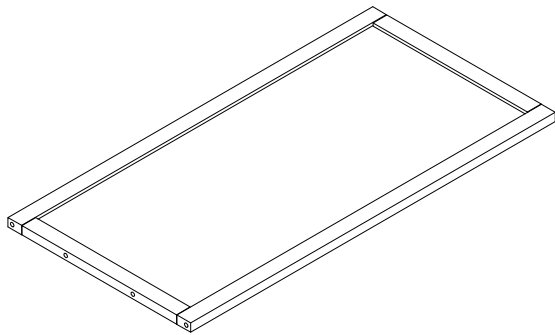


M. SIDE PANEL LEFT - RIGHT (2 pcs)

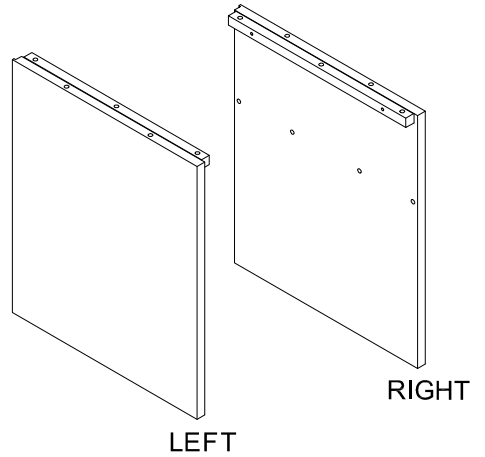


J. LEG SUPPORT (2 pcs)



K. LEG (4 pcs)




N. BOTTOM PANEL (1 pc)

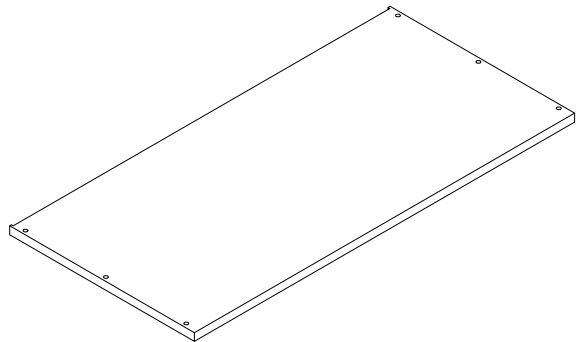


HARDWARE


P. Allen Bolt 2" (50 mm) (8 pcs)




T. Wooden Dowel 1 1/4" [Ø8 mm x 30 mm] (16 pcs)



Q. Allen Bolt 1 1/4" (30 mm) (20 pcs)



U. Metal Dowel 1 1/4" [Ø4 mm x 30 mm] (4 pcs)




R. Wood Screw 5/8" (15 mm) (26 pcs)



W. Spring Washer (28 pcs)



S. Metal plate (4 pcs)



Z. Allenkey (1 pc) (length may vary)




Make sure the bolts are tightly locked against the washers during assembly.
(Please add an extra 1/2 revolution to all the bolts when using spring washer after tightening)

STEP 1 " ASSEMBLY OF CHANGING STATION "


THIS STEP REQUIRES :

- A. BACK PIECE (1 pc)
- B. FRONT PIECE (TOP) (1 pc)
- C. FRONT PIECE (BOTTOM) (1 pc)
- D. SIDE PIECE LEFT - RIGHT (2 pcs)
- E. CHANGER SUPPORT (2 pcs)
- F. CHANGER BOTTOM (1 pc)



- Q. Allen Bolt 1 1/4" (30 mm) (8 pcs)




- U. Metal Dowel 1 1/4" [Ø4 mm x 30 mm] (4 pcs)



- W. Spring Washer (8 pcs)

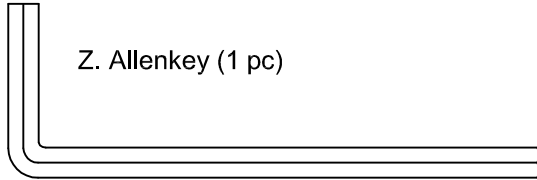

- Z. Allenkey (1 pc)

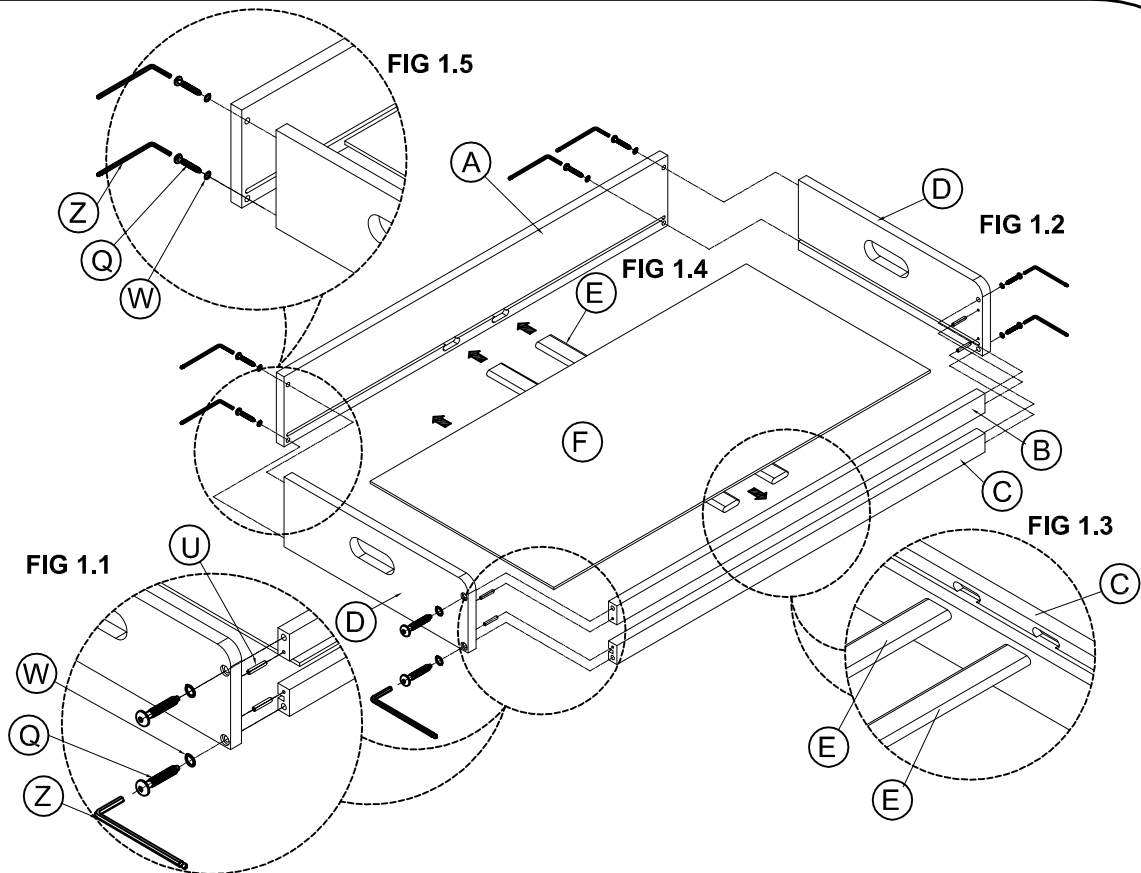

- Insert 4 pcs metal dowels (U) into the holes in the end of front piece top & bottom (B & C) as shown in FIG.1.1.
- Connect front piece top & bottom (B & C) to the side pieces Left-Right (D) using allenbolt 1 1/4" (30 mm)(Q), spring washer (W) and metal dowel (U) as shown in FIG.1.1 & 1.2.
Hand tighten only !
- Insert 2 pcs changer support (E) into the holes in the front piece bottom (C) as shown in FIG.1.3.
- Insert changer bottom (F) into the grooves in side pieces Left-Right (D) and front piece bottom (C).
- Insert 2 pcs changer support (E) & changer bottom (F) into the back piece (A) as shown in FIG.1.4.
- Connect back piece (A) to the side pieces Left-Right (D) using allenbolt 1 1/4"(30 mm)(Q) & spring washer (W) as shown in FIG.1.5.
- Tighten all bolts with allenkey (Z).

STEP 2 " ASSEMBLY OF TABLE PANELS "

THIS STEP REQUIRES :


G .TABLE TOP (1 pc)

H .FIXED SHELF (1 pc)

M. SIDE PANEL LEFT - RIGHT (2 pcs)

N. BOTTOM PANEL (1 pc)


Q. Allen Bolt 1 1/4" (30 mm)
(12 pcs)




T. Wooden Dowel 1 1/4"
[Ø8 mm x 30 mm] (16 pcs)




W. Spring Washer (12 pcs)



Z. Allenkey (1 pc)

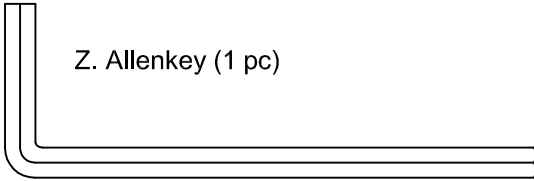

STEP 2.2

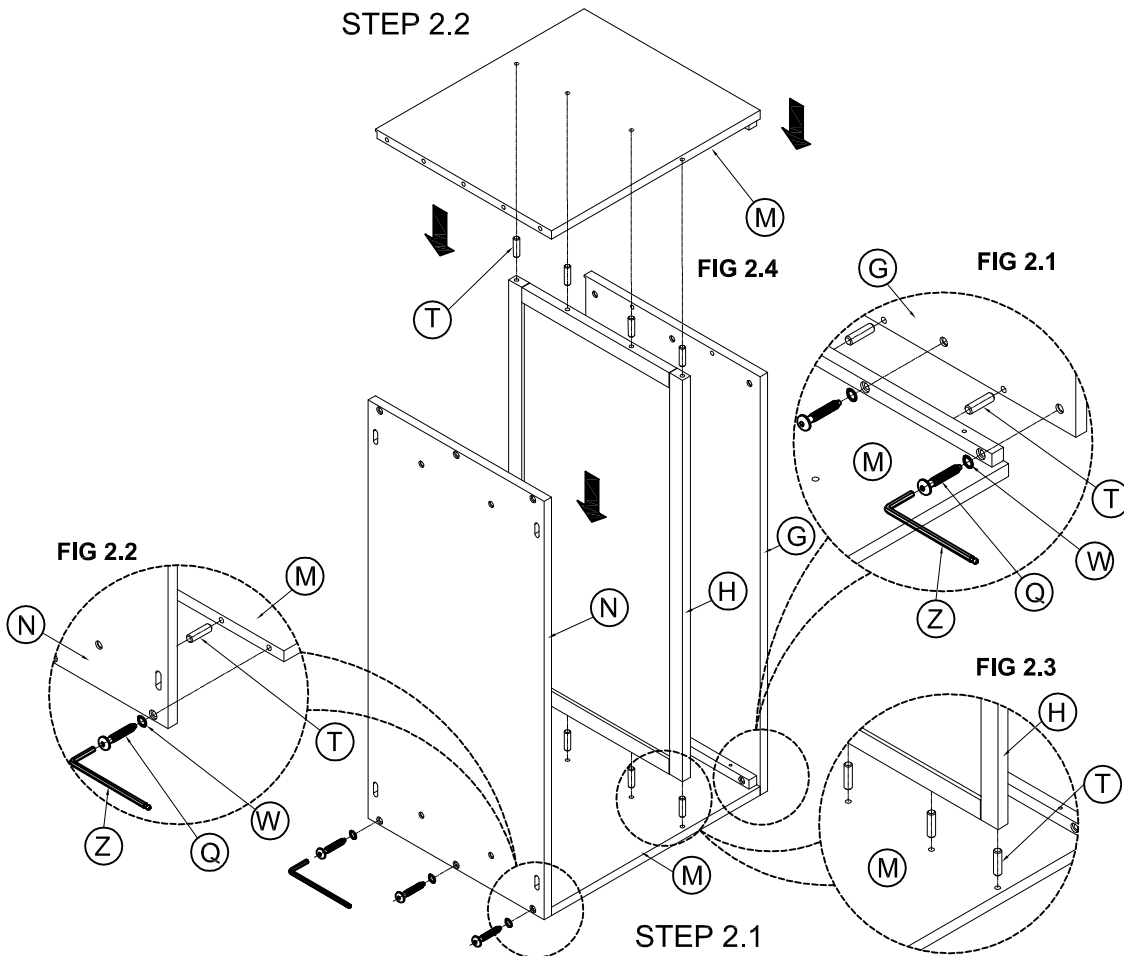

STEP 2.1 :

- Insert 4 pcs wooden dowels (T) into the holes in the end of side panel (M) as shown in FIG.2.1 & 2.2.
- Connect side panel (M) to the table top (G) and bottom panel (N) using allenbolt 1 1/4"(30 mm)(Q), spring washer (W) and wooden dowels (T) as shown in FIG.2.1 & 2.2. Hand tighten only !
- Connect fixed shelf (H) to the side panel (M) using 4 pcs wooden dowels (T) as shown in FIG.2.3.

STEP 2.2 :



- Repeat STEP 2.1 for the other side of side panel (M).
- Tighten all bolts with allenkey (Z).

STEP 3 " ASSEMBLY OF BACK PANEL "

THIS STEP REQUIRES :

- L. BACK PANEL (1 pc)
- R. Wood Screw 5/8" (15 mm) (18 pcs)

Philip Head Screw driver (unsupplied)

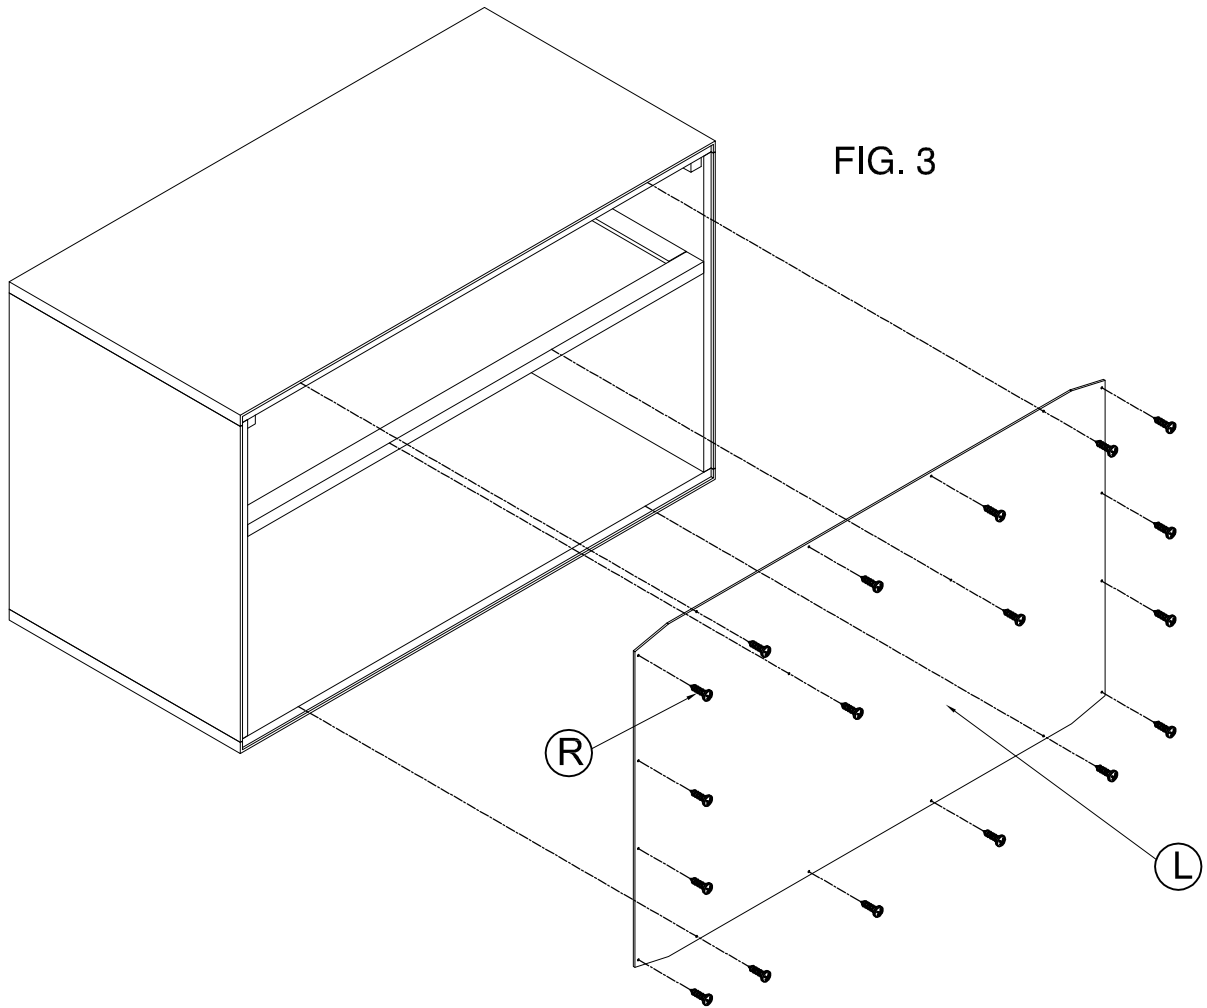

- Using a Phillips head screw driver, attach the Back Panel (L) to the back of the table using the 18 wood screws (R) as shown in FIG.3.
- Make sure the screws are inserted into the predrilled holes provided.

STEP 4 " ASSEMBLY OF TABLE LEGS "


THIS STEP REQUIRES :

J. LEG SUPPORT (2 pcs)

K. LEG (4 pcs)

Z. Allenkey (1 pc)

P. Allen Bolt 2" (50 mm) (8 pcs)



W. Spring Washer (8 pcs)

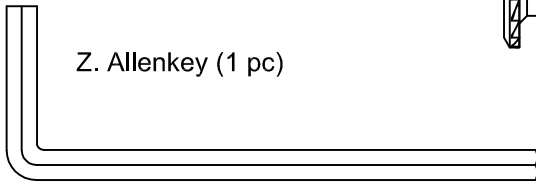



FIG.4.1



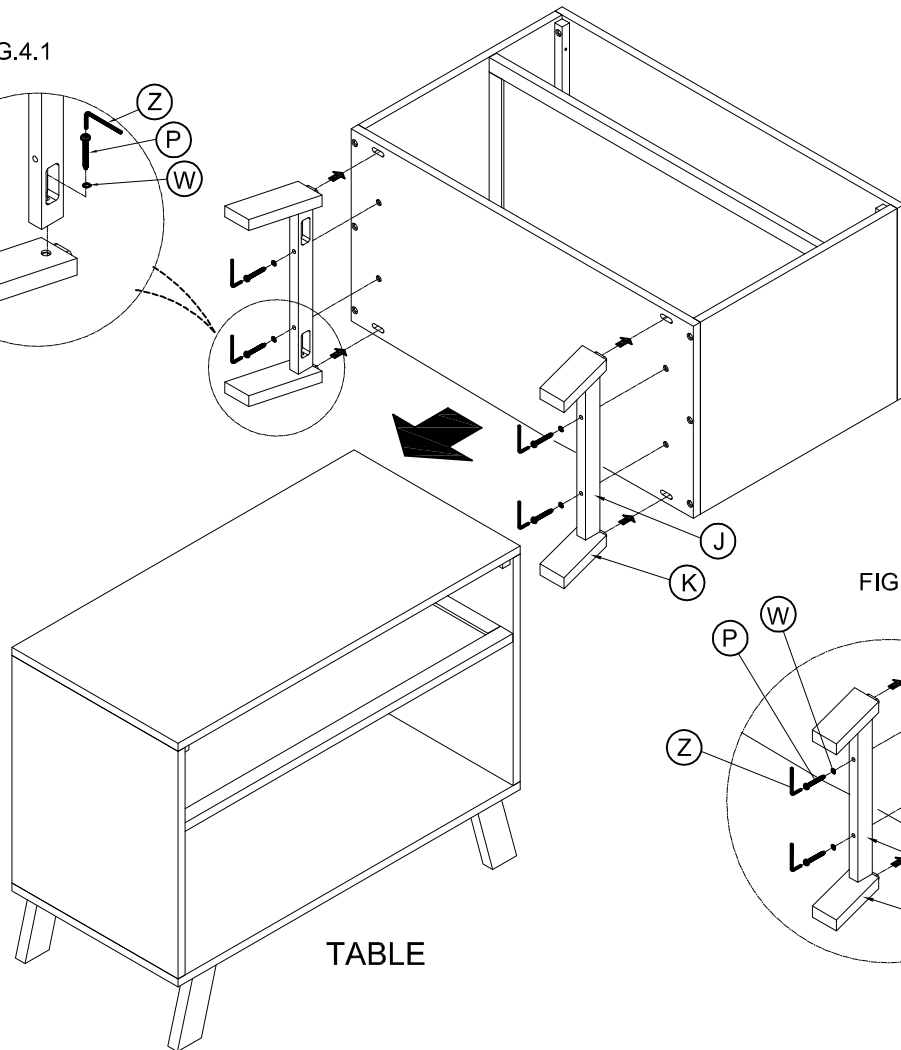


FIG.4.2

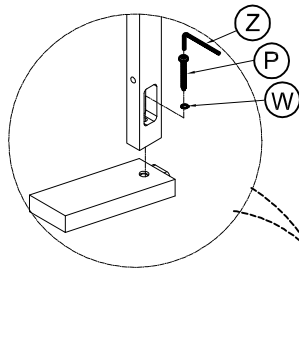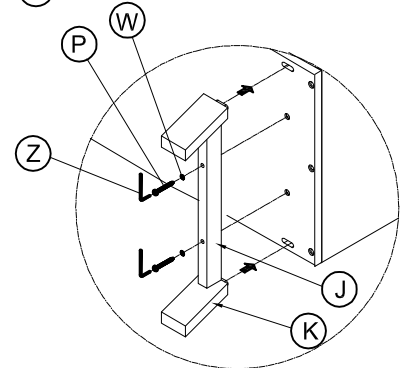

STEP 4.1

- Insert allenbolt 2" (50 mm) (P) and Spring Washer (W) through the holes in the leg support (J) and into the threaded holes on leg (K) as shown in FIG 4.1.
Hand tighten only!
- Repeat step 4.1 for the other 3 legs.

STEP 4.2

- Connect table legs to table bottom using (4 pcs) Allenbolts 2" (50 mm) (P) and spring washer (W) as shown in FIG 4.2.
- Tighten all bolts with allenkey (Z).

STEP 5 " CHANGING STATION INSTALLATION "



THIS STEP REQUIRES :

TABLE (1 pc)
CHANGING STATION (1 pc)
R. Wood Screw 5/8" (15 mm) (8 pcs)

S. Metal plate (4 pcs)



Philip Head Screw driver (unsupplied)



- A. Place the changing station on the top of the table, as shown in FIG.5.1 & 5.2. (see diagram).
- B. Attach metal plate (S) and screw (R) to the back side of changing station and table, as shown in FIG.5.3.
- C. Tighten all screws with Phillips Head Screw driver. Check to see that the Changing Station is secure.

FIG. 5.1

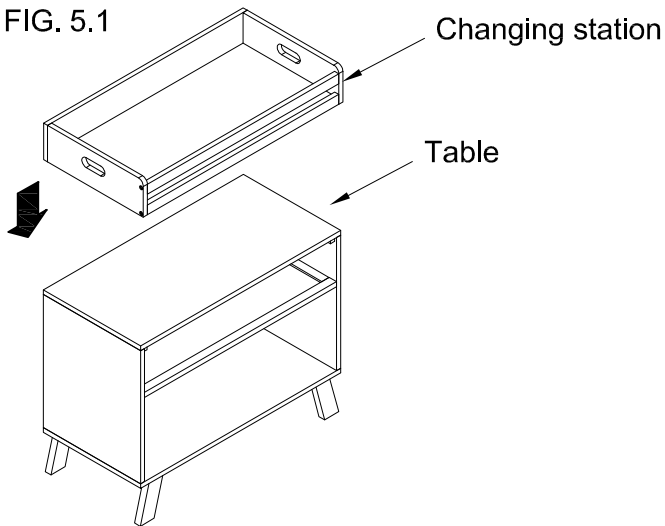


FIG.5.2



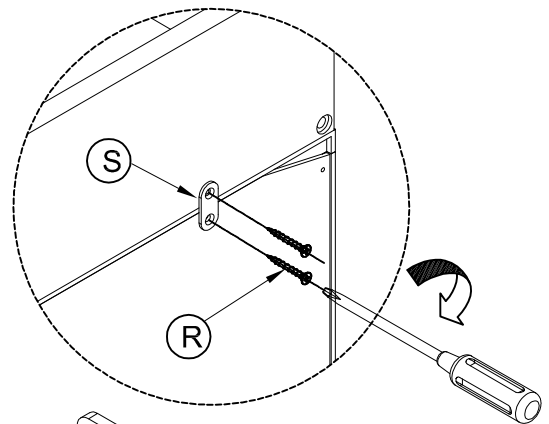



FIG. 5.3

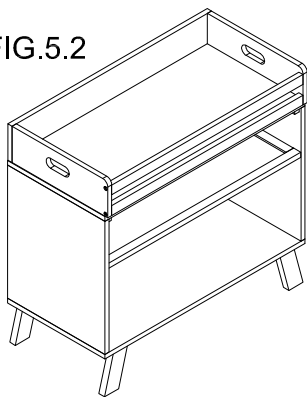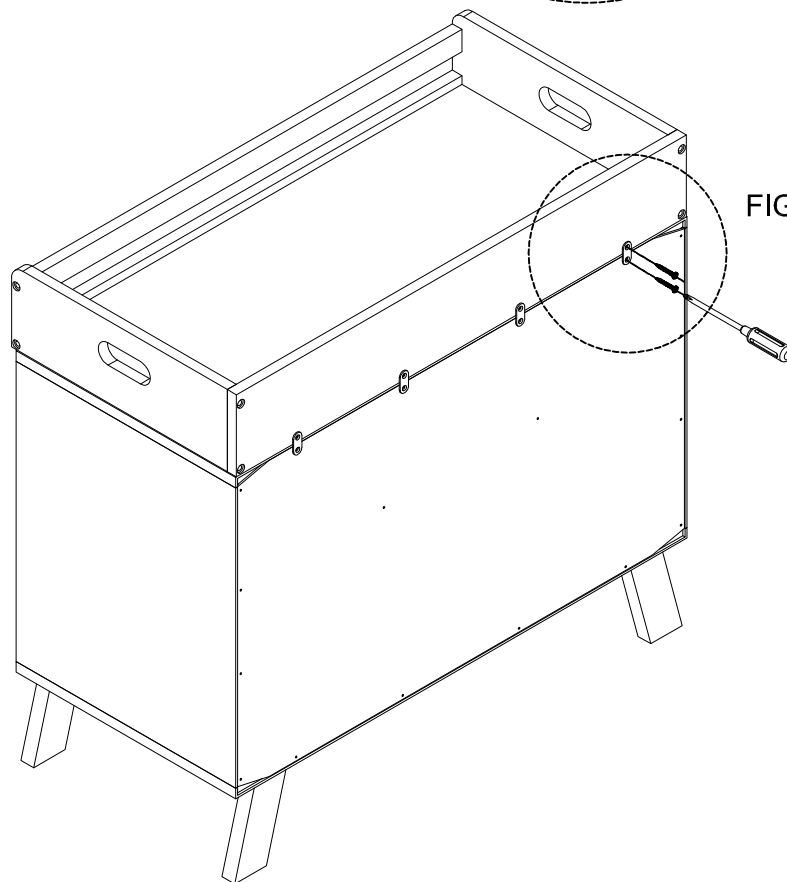

 **“CAUTION: ANY PAD USED IN THIS CHANGING STATION MUST BE AT LEAST 16 INCHES BY 33 INCHES (41 CM X 83.82 CM) WITH A THICKNESS NOT EXCEEDING 1 INCH (2.54 CM).”**

 **WARNING!** FOR CHANGING STATION USE

- READ ALL INSTRUCTIONS BEFORE ASSEMBLING AND USE OF THE CHANGING STATION.

KEEP INSTRUCTIONS FOR FUTURE USE.

- FAILURE TO FOLLOW THESE WARNINGS AND THE ASSEMBLY INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.
- **CAUTION** : THE PAD INTENDED FOR USE ON THE CHANGING STATION SHALL HAVE MINIMUM DIMENSIONS OF 16 INCHES BY 33 INCHES (41 CM X 83.82 CM) WITH A THICKNESS NOT EXCEEDING 1 INCH (2.54 CM).
- THE MAXIMUM WEIGHT SHALL NOT BE GREATER THAN 30 LBS (13.6 KGS).
- DO NOT USE CHANGING STATION IF IT IS DAMAGED OR BROKEN.
- PLEASE CLEAN THE CHANGING STATION WITH A DRY CLOTH AND USE MILD WOOD POLISH IF REQUIRED.

 **WARNING**

FALL HAZARD : CHILDREN HAVE SUFFERED SERIOUS INJURIES AFTER FALLING FROM CHANGING TABLES. FALLS CAN HAPPEN QUICKLY.

- **STAY** IN ARM'S REACH OF YOUR CHILD.
- **ALWAYS** SECURE THIS UNIT TO THE SUPPORT SURFACE BY ATTACHING IT USING THE SCREWS AND METAL PLATES PROVIDED. SEE INSTRUCTIONS.
- THE SURFACE USED SHOULD BE LEVEL, STABLE AND STRUCTURALLY SOUND WITH MINIMUM SURFACE DIMENSIONS OF 35 INCHES (88.9 CM) BY 17 INCHES (43.2 CM).
- THE MAXIMUM WEIGHT SHALL NOT BE GREATER THAN 30 LBS (13.6 KGS).