ASSEMBLY INSTRUCTIONS

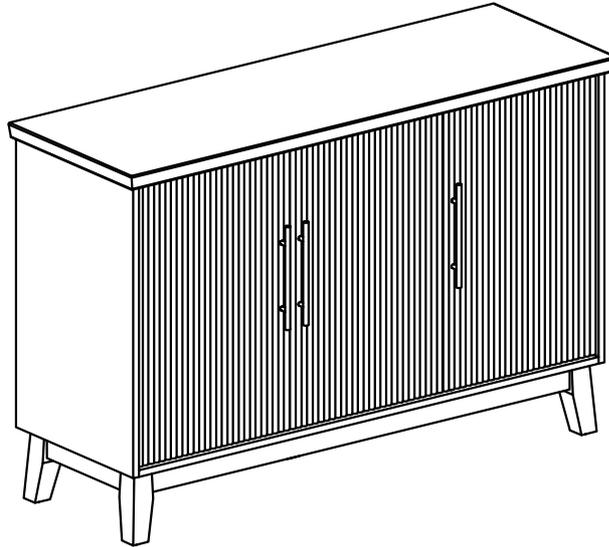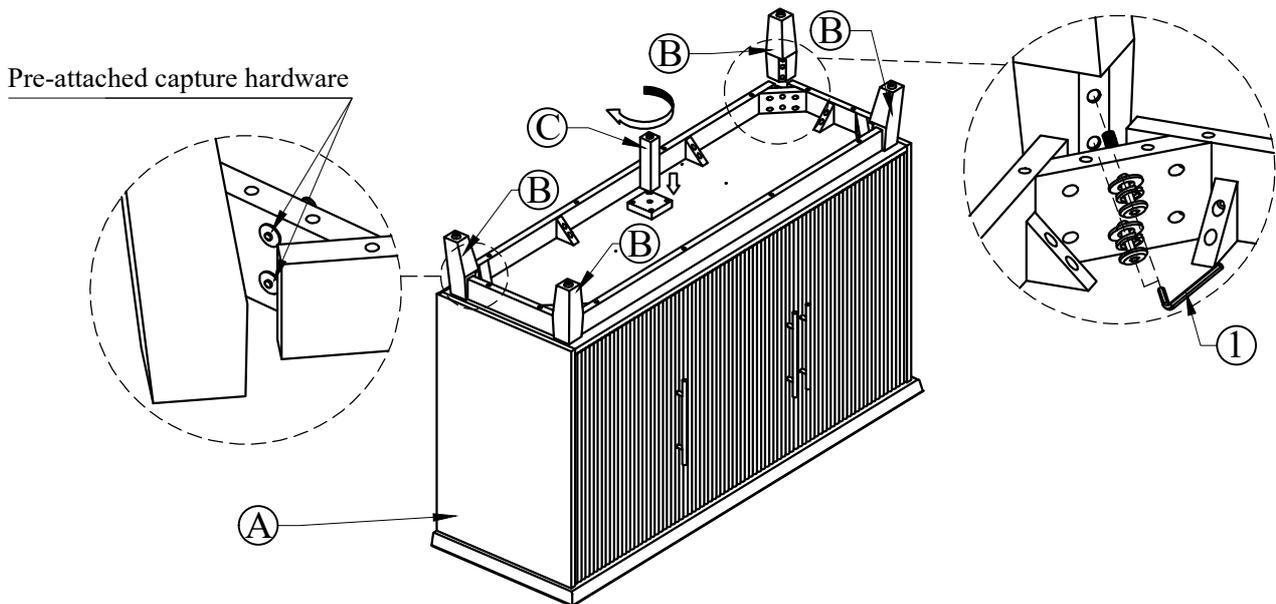|	
SSIO 6813-SV **SERVER**	**SKU#: 42768133**
SSIO 5813-SV **MRBL TOP SERVER**	**SKU#: 42758132**

Manufactured by SSIO for Rooms To Go   *Version 1.0 - 2026/01*

*** Caution. Please read all instructions carefully before starting assembly process. These parts are cumbersome and heavy. Therefore, two people are recommended in order to prevent personal injury and ensure the parts are not damaged during the assembly.

PARTS LIST			
No.	**Sketch**	**Description**	**Qty**
A		Server	1
B		Leg	4
C		Center Leg	1

HARDWARE LIST			
No.	**Sketch**	**Description**	**Qty**
1		Allen Key 4mm	1
2		Safety Hardware	1 set
3		Phillips Screwdriver (not included)	1
Pre-installed on Part A		Allen Bolt Ø5/16" x 65mm — Pre-installed	8
		Lock Washer Ø5/16" x 13mm — Pre-installed	8
		Flat Washer Ø5/16" x 19mm — Pre-installed	8
		Threaded Washer Ø5/16" - 19 x 9mm — Pre-installed	8

CLEANING INSTRUCTION: Clear with a soft and warm water with a diluted mild detergent.
Follow with a soft cloth and clear water rinse. Then dry throughly with a soft cloth

Hardware pack location
6813-SV / 5813-SV SERVER / MRBL TOP SERVER - SKU#: 42768133 / 42758132

*** Caution. Please read all instructions carefully before starting assembly process. These parts are cumbersome and heavy. Therefore, two people are recommended in order to prevent personal injury and ensure the parts are not damaged during the assembly.
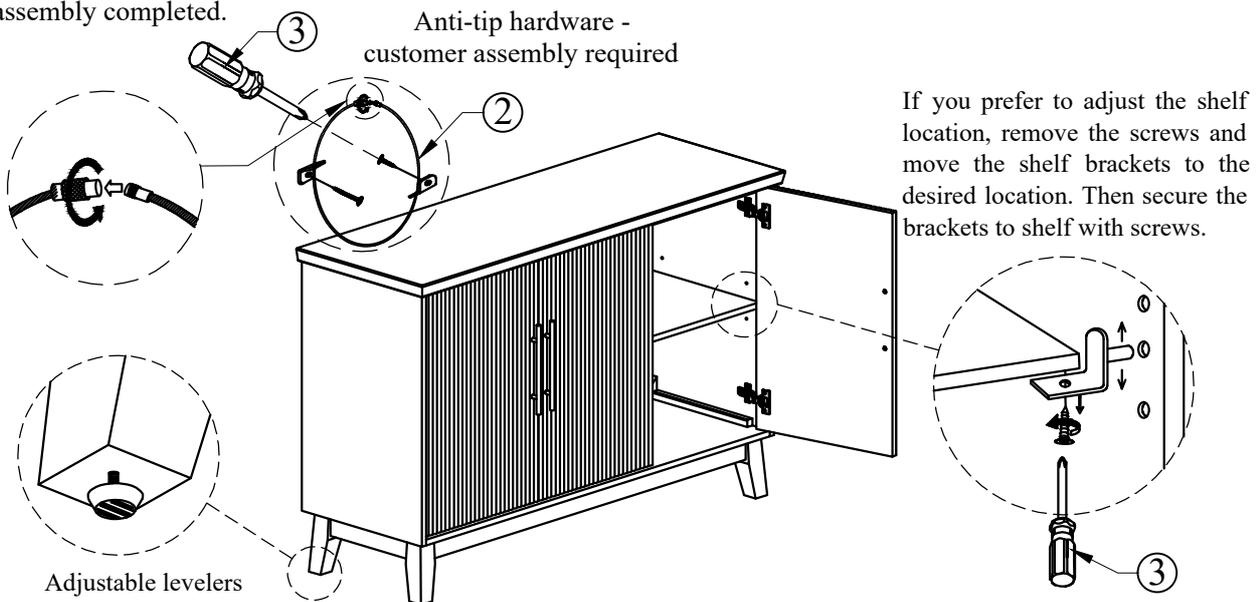
Step 1

Turn Server (A) upside down and place on the floor with a piece of cloth or carpet underneath to prevent finish from scratching. Attach Center Leg(C) to Server (A). Attach Leg (B) to Server (A) by using pre-attached capture hardware and fully tighten with Allen Key (1) provided. Turn the server assembly to the upright position.

Pre-attached capture hardware

Step 2

The Safety Hardware (2) is attached to the back of Server (A). Safety Hardware (2) should be fastened and locked as the picture shows. Adjust the Leveler so the Server is level and does not wobble. The Server is assembly completed.

Anti-tip hardware - customer assembly required

If you prefer to adjust the shelf location, remove the screws and move the shelf brackets to the desired location. Then secure the brackets to shelf with screws.

Adjustable levelers

CLEANING INSTRUCTION: Clear with a soft and warm water with a diluted mild detergent. Follow with a soft cloth and clear water rinse. Then dry throughly with a soft cloth