





UTTERMOST

ASSEMBLY INSTRUCTIONS

STYLE# 22109

Carefully unpack all lamp parts from the carton.

1. Take the lamp carefully out of the Carton, and place it on a flat surface.
2. Be sure the power to the installation point is power off.
3. Place the **Universal Bar** over the **Canopy** and thread **Mounting Ball** onto the Mounting Screw to secure it. Hand tighten until snug.
4. Determine the number of **Rods** to be assembled to the **Fixture Body** according to your hanging height. Pass supply wires through the **Rods**. Thread the **Rods** to connect Nipple #1 and Nipple #2. Then thread Nipple #2 onto the Fixture Body. Hand tighten until snug.
5. Pass the supply wires through the **Canopy** and the hole in the middle of the **Universal Bar**.
6. The power supply wire consists of three wires, one black wire, one white wire and one silver ground wire.
7. Connect the wires as shown :
 - A. Connect the House Ground Wire to the Fixture Ground Wire.
 - B. Connect the House White or Ribbed Wire to the Fixture Supply Wire (White or Ribbed Side).
 - C. Connect the House Black/Red Wire to the Fixture Supply Wire (Black or Smooth Side).
 - D. Wrap each connected wire with Wire Connector and carefully stuff all of the connected wires into the Outlet Box.
8. Place the **Glass Shade** carefully. Then thread the **Metal Sleeve** onto the **Socket**.
9. Lock the **Socket Collar** with the **Plastic Wrench** to secure the **Glass Shade** and the **Metal Sleeve**. Hand tighten until snug.
10. Install correct **Bulb** to the **Socket** referring to fixture markings and/or labels for maximum wattage. (Included)

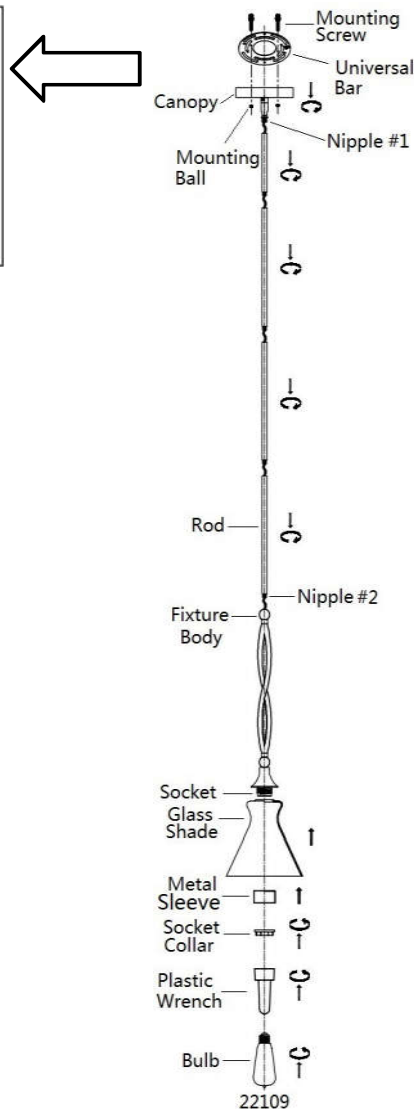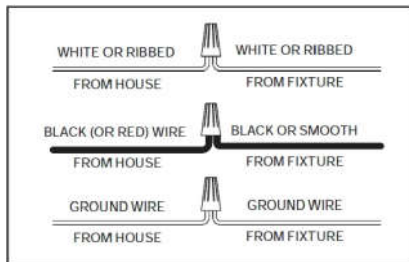

PO BOX 558/3325 GRASSY HILL RD. ROCKY MOUNT, VIRGINIA 24151

www.uttermost.com