

CREEKSIDE 2.0 COLLECTION

THANK YOU FOR YOUR PURCHASE



WARNING DANGER

Failure to follow these warnings and assembly instructions could result in serious injury or death. To help prevent serious or fatal injuries from entrapment or falls:

- Read all instructions before assembling bunk bed and keep these instructions for future reference.
- Before each usage or assembly, inspect bunk bed for damaged hardware, loose joints, missing parts, or sharp edges. DO NOT Use bunk bed if any parts are missing or broken.
- DO NOT Use substitute parts. Contact your local Rooms To Go or visit www.ROOMSTOGO.COM for replacement parts and instructional literature if needed.
- Follow the information on the warnings appearing on the upper bunk end structure and on the carton, DO NOT REMOVE WARNING LABEL FROM BED.
- Always use the recommended size mattress or mattress supports, or both to help prevent the likelihood of entrapment or falls.
- Ensure thickness of mattress and foundation combine does not exceed **10 inches (255mm)** and mattress surface is at least **5 inches (127mm)** below upper edge of guardrails.
- Do not allow children under 6 years of age to use the upper bunk.
- Periodically check and ensure that the guardrail, ladder, and other components are in their proper position, free from damage, and that all connectors are tight.
- Do not allow horseplay on or under the bed and prohibit jumping on the bed.
- Limit top bunk use to one person.
- Always use the ladder for entering and leaving the upper bunk.
- Use of night light may provide added safety precaution for a child using the upper bunk.
- Always use guardrails on both long sides of the upper bunk. If the bunk bed will be placed next to the wall, the guardrail that runs the full length of the bed should be placed against the wall to prevent entrapment between the bed and wall.
- The use of water or sleep flotation mattress is prohibited.
- This bunk bed meets all the requirements of ASTM 1427-19.




STRANGULATION HAZARD:

Never attach or hang items to any part of the bunk bed that are not designed for use with the bed; for example, but not limited to, hooks, belts, and jump ropes.

11/7/2022 Page 1 of 97

PARTS LIST

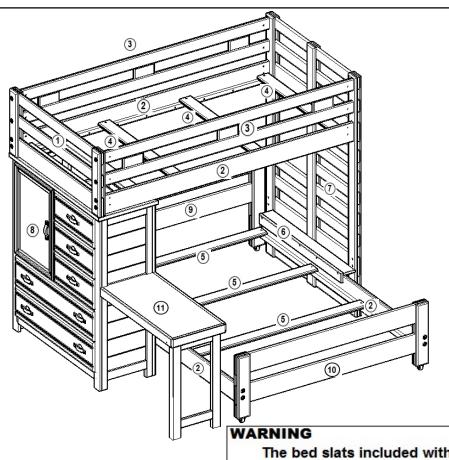

3854440P TWIN/FULL LOFT W/CHEST CHARCOAL						
3854440P TWIN/FULL LOFT W/CHEST CHARCOAL						
RTG SKU # STYLE # ITEM DESCRIPTION						
35540409 40G-706 1 PC BUNKBED END TWIN						
35740403 40G-705 TWIN LOFT END						
36940408 40G-709 FULL CASTER BED HD & FT						
36640402 40G-730 6 PC RAILS (2 GUARD & 4 SIDE F	RAILS)					
36040400 40G-711 LOFT CHEST						
37040401 40G-735 TWIN RAIL CAP						
38000232 100-645 TW. SLAT PACK (4)						
38100234 100-646 FULL SLAT PACK (4)						
36240404 40G-601 FOLDING DESK (Add on)						

3854441P TWIN/FULL LOFT W/CHEST CHESTNUT						
RTG SKU#	STYLE#	ITEM DESCRIPTION				
35540411	40B-706	1 PC BUNKBED END TWIN				
35740415	40B-705	TWIN LOFT END				
36940410	40B-709	FULL CASTER BED HD & FT				
36640414	40B-730	6 PC RAILS (2 GUARD & 4 SIDE RAILS)				
36040412	40B-711	LOFT CHEST				
37040413	40B-735	TWIN RAIL CAP				
38000232		TW. SLAT PACK (4)				
38100234		FULL SLAT PACK (4)				
36240416	40B-601	FOLDING DESK (Add on)				

The bed slats included with this bed will not support a mattress alone, this bed requires Bunkie boards (sold separately)

	PARTS LIST	QTY		PARTS LIST	QTY	HAR	RDWARE LIST	QTY
1		1 Pc	7	19	1 Pc	A	5/16"-18 x 3 3/8" Bolt	24 Pcs
2	Twin top bunk bed end	4 Pc		1 pc bunkbed end twin		В	5 mm Hex key	1 Pc
	Side rails	4 PC	8	Loft chest		С	6 x 1 1/4" Drywall screw	16 Pcs
3	Guardrails	2 Pc			1 Pc	D	3/8" x 3 1/8" Metal pin	2 Pcs
4		4 Pc	9		1 Pc	E	Casters	4 Pcs
	Twin slats			Caster bed headboard				
5	Full slats	4 Pc	10	Caster bed footboard	1 Pc			
—	1 4 5.4.5	<u> </u>	├─					
6		1 Pc	11		1 Pc		TWO P	EOPLE HTEN (
	Twin rail cup			Folding desk (Add on)				ARE C
						-		

16 Pcs						
	FOLDING DESK HARDWARE					
2 Pcs	С	Dummin	0 D			
	ା ୯	6 x 1 1/4"	2 Pcs			
4 Pcs		Drywall screw				

TOOLS NEEDED Phillips screwdriver (not included)

Allen wrench (included)

TWO PEOPLE ARE NEEDED TO ASSEMBLE DO NOT TIGHTEN COMPLETELY UNTIL ALL PIECES ARE CONNECTED TOGETHER


11/7/2022 Page 45 of 97


ASSEMBLY INSTRUCTIONS


TIPS: SEE ILLUSTRATION BELOW


- 1- Use the long end of the allen wrench to fasten bolts loosely and quickly.
- 2- Use the short end of the allen wrench for final tightening




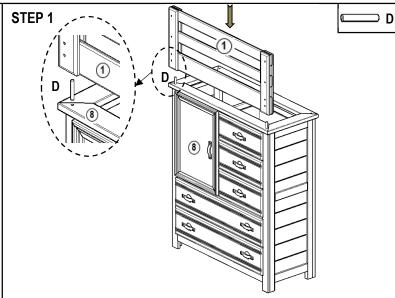

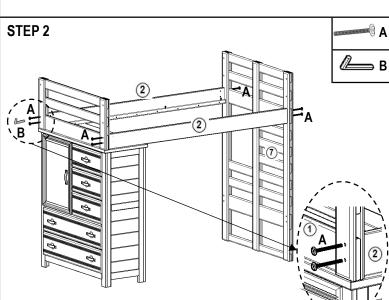

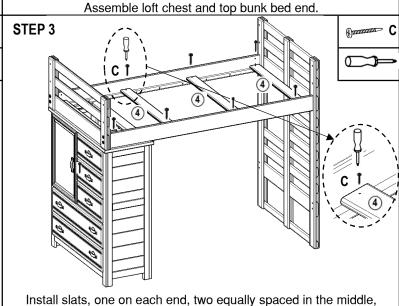

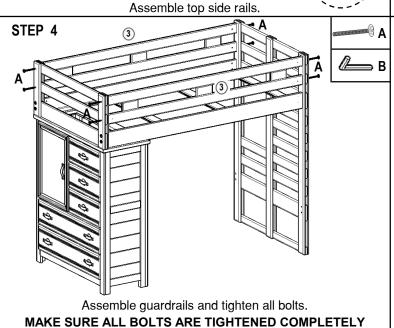

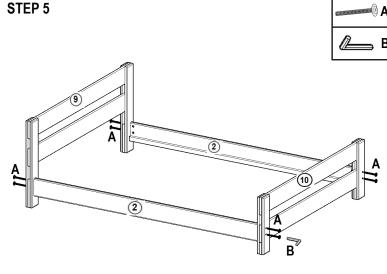

then fasten with 1 1/4" screws.


Assemble side rails

MAKE SURE ALL BOLTS ARE TIGHTENED COMPLETELY

Page 46 of 97


11/7/2022



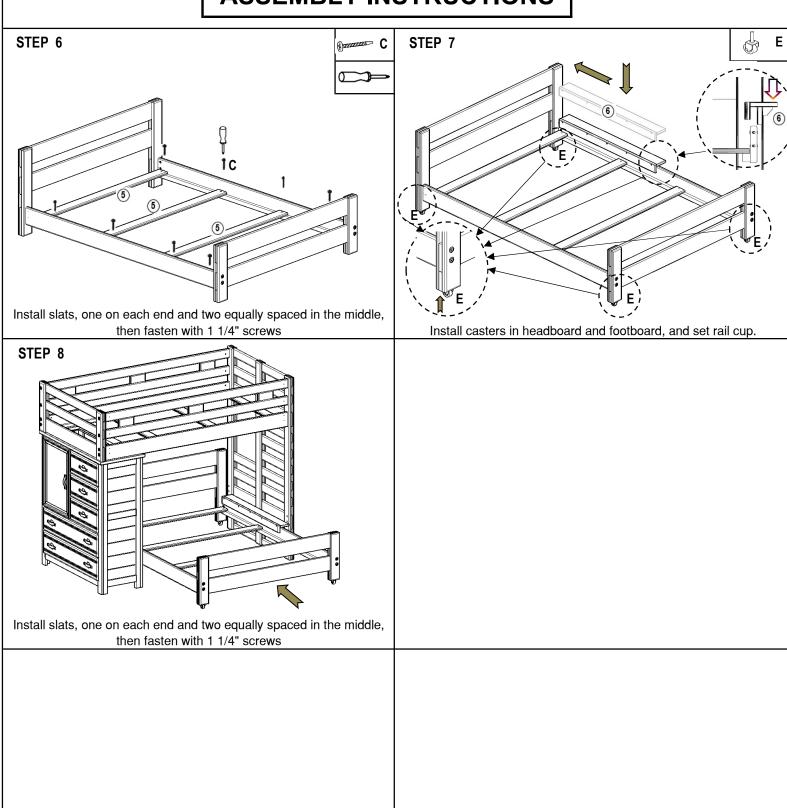

11/7/2022 Page 47 of 97

ASSEMBLY INSTRUCTIONS

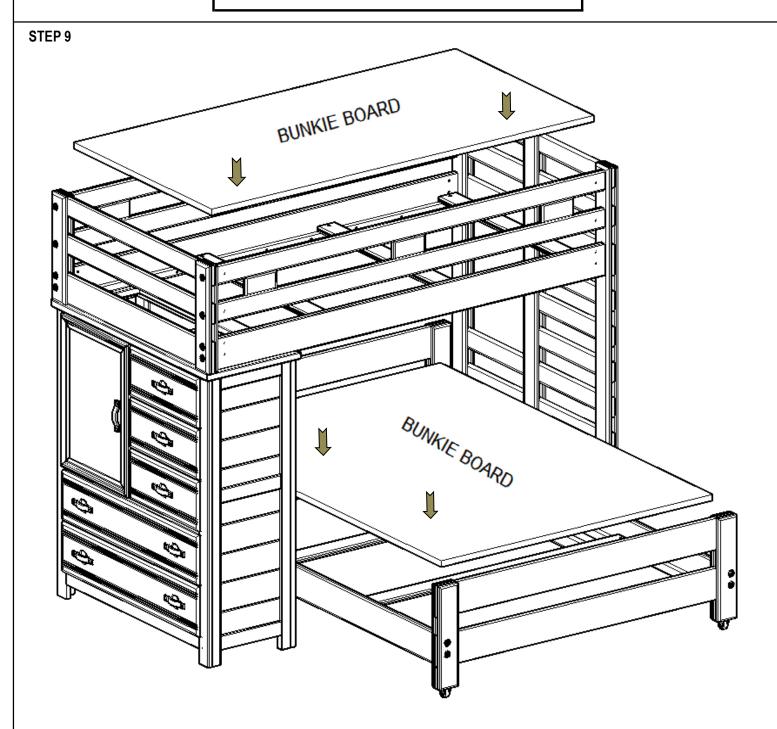

Place Bunkie boards (required, sold separately) on top of the slats


Use only correct mattress dimensions and Bunkie board:


Twin size mattress- 74" - 75" long and 37-1/2" - 38-1/2" wide
Twin size Bunkie board- 74" long and 37-1/2" wide
Full size mattress- 74" - 75" long and 52-1/2" - 53-1/2" wide
Full size Bunkie board- 74" long and 52-1/2" wide


PLEASE CONTACT YOUR RETAIL STORE WITH SERVICE OR PARTS REPLACEMENT REQUEST


11/7/2022 Page 48 of 97

ASSEMBLY INSTRUCTIONS

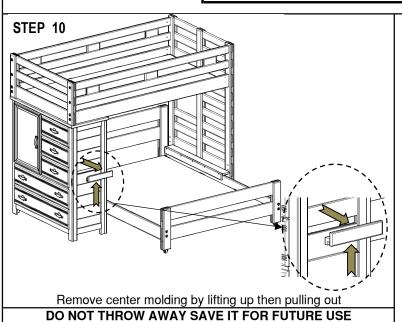

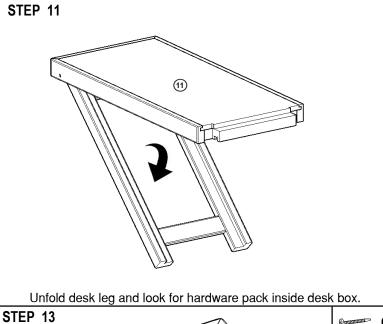




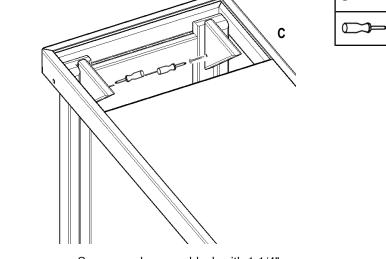

Unfold corner supports

Secure each corner block with 1 1/4" screw (from desk box hardware pack) in the pre-bore hole.



Place folding desk by sliding into the opening of loft chest then push down

11/7/2022 Page 49 of 97