


Assembly Instruction---Accent Chair


PARTS #	PARTS NAME	DRAWING	QTY
P1	Front Legs		2
P2	Right Back Leg		1
P3	Left Back Leg		1
P4	Chair		1
P5	Seat Cushion		1

Hardware#	PARTS NAME	DRAWING	QTY
H1	Plastic Washers		2
H2	Flat Washers φ5/16"		6
H3	Lock Washers φ5/16"		6
H4	Bolts φ5/16*2-3/8"		6
H5	Allen Wrench φ5/16"		1

1. Take out the legs and hardware underneath the seat cushion.

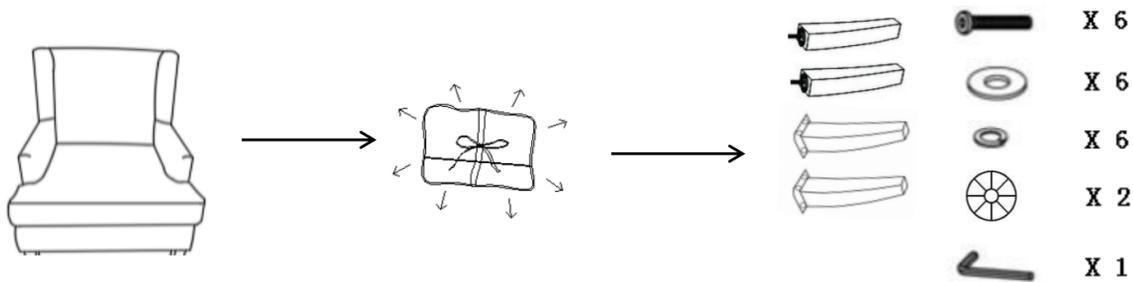

2. Place plastic washer (H1) on front leg (P1) and attach to chair base (P4) by screwing clockwise into corresponding holes. Attach right back leg (P2) and left back leg (P3) with bolt (H4), lock washer (H3), flat washer (H2) to seat frame (P4). Tighten the bolts (H4) with allen wrench (H5).

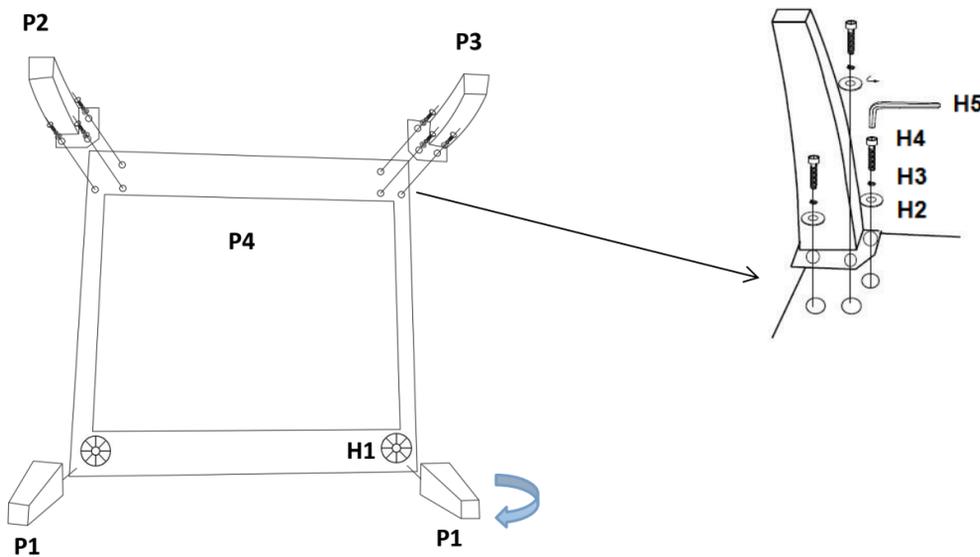

3. Place the chair upright on a level surface. Put seat cushion (P5) on the chair. Assembly is complete.



