

STYLE#: 21537

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE

Carefully unpack all lamp parts from carton. We suggest a licensed electrician for all fixture installations.

- 1. Take the lamp carefully out of the Carton, and place on a flat surface.
- 2. Be sure power to the installation point is OFF. Follow the steps below for assembly.
- 3. Adjust the length of Wire & Chain needed for your installation, remove excess. Pass supply wires through the Rods and Part B.

Thread the **Rods** to connect the **Part B** and **Nipple** of the **Fixture Body**. Hand tighten until sung.(See Figure 1)

- 4. Thread the Knob to connect the Part A into Side hole of the Part B. Then hand tighten until sung. (See Figure 2)
- 5. Lower Metal Shade over Rods & Cluster then connect Hooks to Metal Ring.
- 6. Fasten the Cross bar to the outlet box .Secure the Nipple onto the Canopy with Loop #1.
- 7. Adjust Chain length as needed, remove excess. Thread Quick Link#1 into Loop #1 on the Canopy, then secure Loop #2 onto the Nipple #2 with Fixture Body and thread Quick Link #2 into Loop #2 on the Fixture Body. Hand tighten until snug.


Figure 3

- 8. Pass the supply wires through the Canopy and the hole in the middle of the Cross Bar.
- 9. The power supply wire consists of three wires, one black wire, one white wire and one silver ground wire.

Connect the wires as shown.(See Figure 3)

- **A.**Connect the House Ground Wire to the Fixture Ground Wire.
- **B.**Connect the House White (or Ribbed) Wire to the Fixture Supply Wire (White or Ribbed Side).
- C.Connect the House Black (or Red) Wire to the Fixture Supply Wire (Black or Smooth Side).
- D.Wrap each connected wire with Wire Connector and carefully stuff all of the connected wires into the Outlet Box.

10. Install the correct Bulb(Bulb Included) into the Socket until snug.

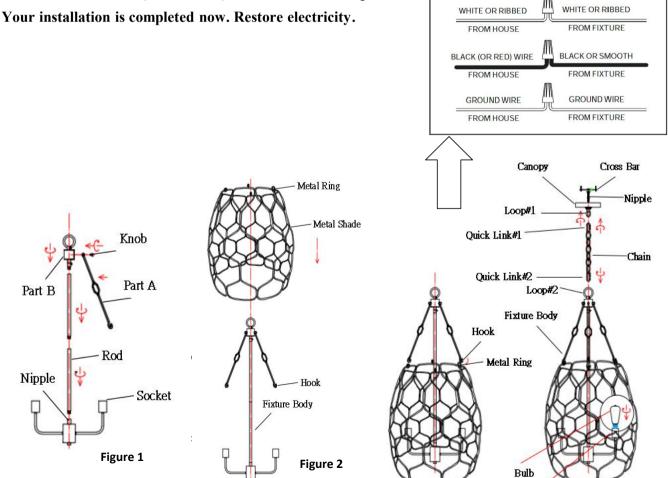

Socket